

東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG-21855N (K)

保守率	良	0.78
	中	0.76
	否	0.72



--	--

光源	名称	LED
	形名	—
	光束	16500 lm × 1

効率	F $\frac{1}{2}$	0.1 %
	F $\frac{3}{4}$	99.9 %
	F \circ	100 %
	器具光束	16500 lm

備考	
----	--

前面	ガラス (クリアー)
反射面	

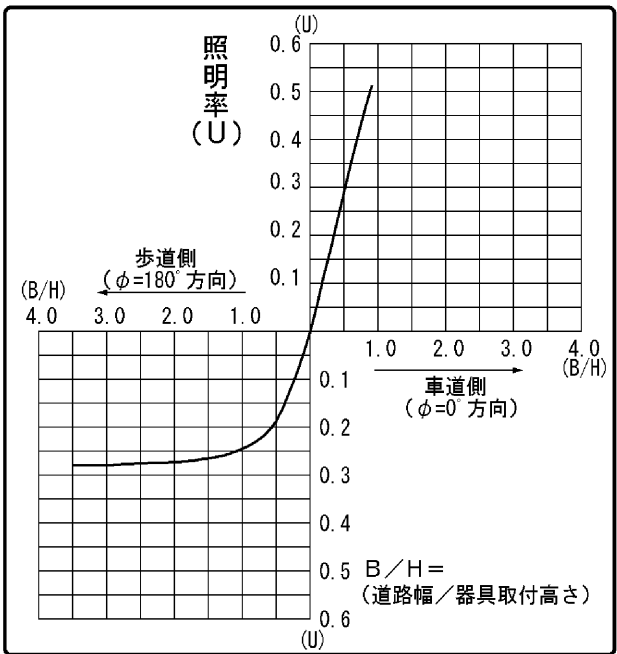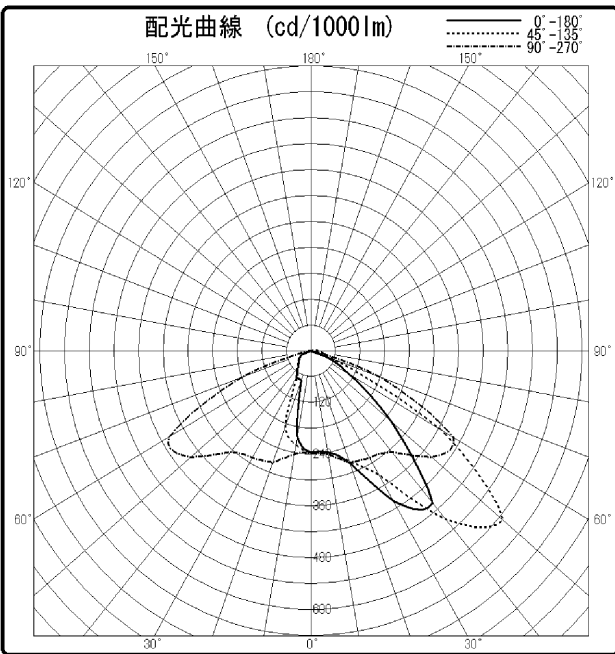

光度 (cd/1000lm)		0°	45°	90°	135°	180°
0°	0°	236	236	236	236	236
10°	0°	240	239	245	221	199
20°	0°	277	273	276	185	72
30°	0°	402	333	286	68	72
40°	0°	462	510	306	55	57
50°	0°	255	609	383	45	48
60°	0°	99	365	401	36	34
70°	0°	31	63	185	24	27
80°	0°	6	8	5	5	2
90°	0°	0	0	2	2	1
100°	0°	0	0	0	0	0
110°	0°	0	0	0	0	0
120°	0°	0	0	0	0	0
130°	0°	0	0	0	0	0
140°	0°	0	0	0	0	0
150°	0°	0	0	0	0	0
160°	0°	0	0	0	0	0
170°	0°	0	0	0	0	0
180°	0°	0	0	0	0	0

