


東芝照明器具配光データシート

名称	LED高天井照明器具
形名	BCP500_100

保守率	良	0.83
	中	0.80
	否	0.76

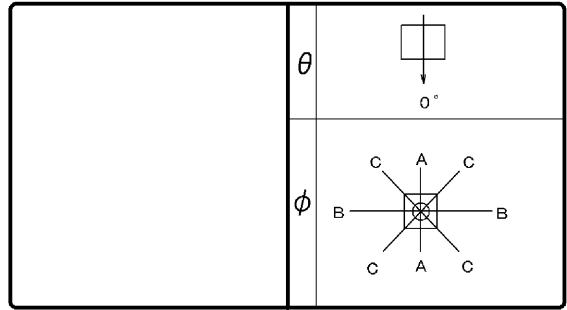

光源	名称	LED
	形名	—
	光束	10000 lm × 1

効率	F ◡	0%
	F ◣	100%
	F ○	100%
	器具光束	10000 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
フィリップスブランド
(銘板形名) :
BCP500 G4 LED100/850
PSU S-MB JP

前面	ガラス (クリアー)
反射面	レンズ

θ \ φ	A-A	B-B	C-C
0°	490		
10°	484		
20°	461		
30°	409		
40°	316		
50°	202		
60°	80		
70°	24		
80°	7		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		50	30	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数	照明率 (×0.01)																			
0.60	71	66	59	56	51	49	70	64	58	55	51	49	56	54	50	49	49	48	45	43
0.80	84	76	72	68	64	62	82	75	71	67	64	61	69	66	63	61	61	60	56	55
1.00	91	82	79	73	71	68	89	80	78	73	70	67	75	71	69	67	68	66	62	61
1.25	98	87	87	80	79	74	95	86	85	79	78	74	82	78	76	73	74	72	69	67
1.50	103	90	92	84	85	79	100	89	90	83	84	78	87	81	81	77	79	76	73	71
2.00	110	95	101	90	94	86	106	94	99	89	93	85	94	88	89	84	86	83	80	78
2.50	114	98	106	94	100	90	110	97	103	93	98	89	98	91	94	88	90	87	84	82
3.00	116	100	110	96	104	93	113	99	107	95	102	92	101	93	97	91	93	89	87	85
4.00	120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	92	90	88
5.00	122	103	118	101	113	99	118	102	114	100	110	98	107	98	104	96	99	94	92	91
10.00	126	106	124	104	121	103	122	104	120	103	117	102	112	101	110	100	104	98	97	95

