


■ 東芝ランプ 配光データシート

名 称	東芝LED電球ハロゲン形
形 名	LDR5W-M-E11 /4
光 束	460 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

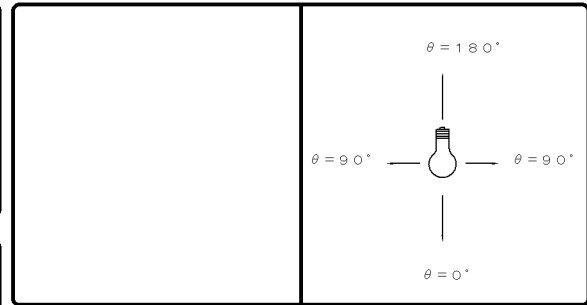

効 率	F	%
	F	%
	F	100 %
	器具 光束	460 lm

最大取付間隔	
A-A	0.30H
B-B	0.30H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
0°	7456	25°	156
1°	7389	30°	68
2°	7219	35°	38
3°	6936	40°	25
4°	6565	45°	21
5°	6132	50°	19
6°	5644	55°	16
7°	5113	60°	15
8°	4564	65°	13
9°	4000	70°	10
10°	3439	75°	7
11°	2908	80°	4
12°	2411	85°	2
13°	1948	90°	1
14°	1558		
15°	1233		
16°	976		
17°	779		
18°	626		
19°	511		
20°	418		

反 射 率 (%)	天井	80						70						50				30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	照 明 率 (×0.01)																				
0.60	106	97	97	92	92	89	104	97	96	92	91	89	95	91	91	89	90	88	86	85	
0.80	112	102	104	97	98	94	110	101	103	97	98	94	101	96	96	93	95	93	91	90	
1.00	117	105	109	101	103	98	115	104	107	100	102	97	105	99	100	97	99	96	94	93	
1.25	120	106	111	102	105	99	117	105	110	101	104	98	106	100	102	98	100	97	95	94	
1.50	122	107	114	103	108	100	119	106	121	102	106	99	108	101	103	98	101	98	95	94	
2.00	125	109	118	105	112	102	122	108	151	104	110	101	111	103	106	100	103	99	97	95	
2.50	128	111	121	107	116	104	124	109	181	106	114	104	113	105	109	102	105	101	99	97	
3.00	131	112	125	109	120	107	127	111	121	108	117	106	115	106	112	104	108	103	101	99	
4.00	134	114	130	121	126	110	130	113	126	111	122	109	119	109	117	108	111	106	104	103	
5.00	137	116	133	124	130	113	132	114	129	113	126	112	122	111	120	110	114	109	107	105	
10.00	142	119	141	129	140	119	137	118	136	118	136	118	128	116	128	116	121	114	113	112	

