

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKD60951MN2-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		5900 lm

保守率	良	0.77
	中	0.72
	否	0.68

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー（透明）
反射面	銀色梨地

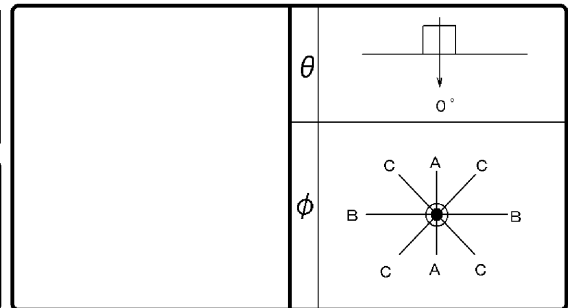

備考	
----	--

光度 (cd/1000lm)					反射率 (%)	天井		80						70						50						30			20			0
$\theta \backslash \phi$	A-A	B-B	C-C	壁		70						50						30						10			0					
				床		70		50		30		70		50		30		50		30		30		10	0							
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数					固有照明率 (×0.01)																											
0°					0.60		82	75	71	68	65	63	80	75	71	67	65	63	69	67	64	62	63	62	59	58						
10°					0.80		94	86	84	79	78	75	92	85	83	79	77	75	81	78	76	74	75	74	71	70						
20°					1.00		99	89	90	83	83	79	97	88	88	83	83	79	86	82	81	78	80	77	75	74						
30°					1.25		105	93	96	88	89	84	102	92	94	87	88	83	91	86	86	83	84	82	79	78						
40°					1.50		108	96	100	91	94	87	106	94	98	90	93	87	95	89	90	86	88	85	82	81						
50°					2.00		114	99	107	95	101	92	111	98	104	95	99	92	100	93	96	91	93	89	87	86						
60°					2.50		117	101	111	98	105	95	113	100	108	97	103	94	103	95	99	93	96	92	90	88						
70°					3.00		119	102	113	99	109	97	115	101	111	98	106	96	105	97	102	95	98	94	92	90						
80°					4.00		122	104	117	102	113	100	118	103	114	101	111	99	108	99	105	97	100	96	94	92						
90°					5.00		124	105	120	103	116	101	120	103	116	102	113	100	110	100	107	99	102	97	95	94						
100°					10.00		127	106	125	105	123	105	123	105	121	104	119	104	113	102	112	102	106	100	98	97						
110°																																
120°																																
130°																																
140°																																
150°																																
160°																																
170°																																
180°																																

