

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-60033MN2V+LEK-4240 16A01D

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具 光束		6100 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

前 面	下面開放
反射面	銀色梨地仕上げ

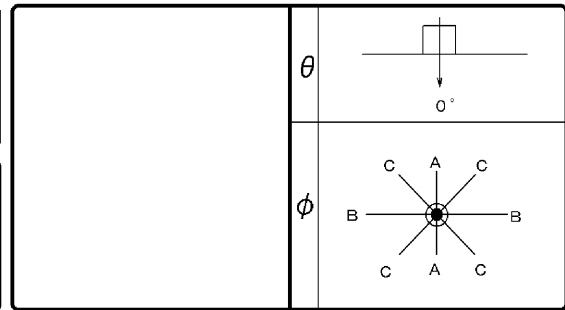

備 考	LEDD-60033MN2V+LEK-424016A01D
-----	-------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1090		
10°	1035		
20°	878		
30°	446		
40°	158		
50°	68		
60°	30		
70°	7		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60	88 81 79 75 73 71 87 81 78 75 73 71 77 74 72 71 72 70 68 67																							
0.80	100 90 91 85 85 82 98 90 90 85 85 82 88 84 84 81 82 81 78 77																							
1.00	103 93 95 88 89 84 101 92 94 87 88 84 91 86 87 84 85 83 81 80																							
1.25	108 96 99 91 93 88 105 95 98 90 92 87 95 89 90 86 88 86 83 82																							
1.50	111 97 103 93 97 90 108 96 101 93 96 90 98 91 93 89 91 88 86 85																							
2.00	115 100 108 97 103 94 112 99 106 96 101 94 102 95 98 92 95 91 89 88																							
2.50	118 102 112 99 107 96 114 101 109 98 105 96 104 96 101 95 97 93 91 90																							
3.00	120 103 115 100 110 98 116 102 112 99 108 97 106 98 103 96 99 95 93 91																							
4.00	123 104 118 102 115 101 119 103 115 102 112 100 109 100 106 98 102 97 95 94																							
5.00	124 105 121 104 118 102 120 104 117 103 114 102 111 101 109 100 103 98 97 95																							
10.00	128 107 126 107 125 106 124 106 122 105 121 105 114 103 113 103 107 101 100 98																							

