

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-60033MWV+LEK-424016A01D

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		6100 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

前 面	下面開放
反射面	銀色梨地仕上げ

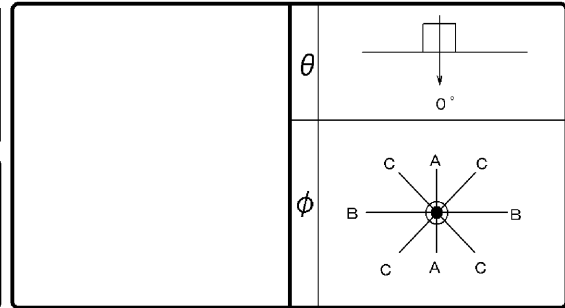

備考	LEDD-60033MWV+LEK-424016A01D
----	------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1090		
10°	1035		
20°	878		
30°	446		
40°	158		
50°	68		
60°	30		
70°	7		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		88	81	79	75	73	71	87	81	78	75	73	71	77	74	72	71	72	70	68	67			
0.80		100	90	91	85	85	82	98	90	90	85	85	82	88	84	84	81	82	81	78	77			
1.00		103	93	95	88	89	84	101	92	94	87	88	84	91	86	87	84	85	83	81	80			
1.25		108	96	99	91	93	88	105	95	98	90	92	87	95	89	90	86	88	86	83	82			
1.50		111	97	103	93	97	90	108	96	101	93	96	90	98	91	93	89	91	88	86	85			
2.00		115	100	108	97	103	94	112	99	106	96	101	94	102	95	98	92	95	91	89	88			
2.50		118	102	112	99	107	96	114	101	109	98	105	96	104	96	101	95	97	93	91	90			
3.00		120	103	115	100	110	98	116	102	112	99	108	97	106	98	103	96	99	95	93	91			
4.00		123	104	118	102	115	101	119	103	115	102	112	100	109	100	106	98	102	97	95	94			
5.00		124	105	121	104	118	102	120	104	117	103	114	102	111	101	109	100	103	98	97	95			
10.00		128	107	126	107	125	106	124	106	122	105	121	105	114	103	113	103	107	101	100	98			

