

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKD60043MN2-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		6110 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

前 面	下面開放
反射面	白色

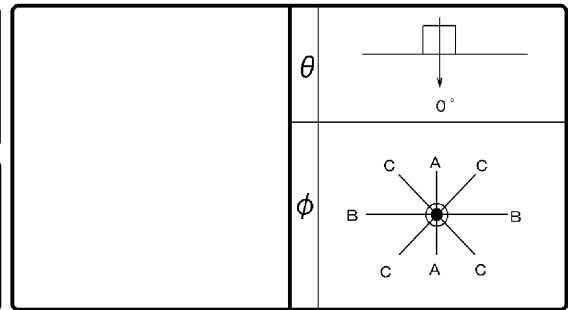

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1089		
10°	1036		
20°	881		
30°	439		
40°	155		
50°	66		
60°	32		
70°	10		
80°	3		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		固有照明率 (×0.01)																						
0.60		88	81	79	75	73	71	87	81	78	75	73	71	77	74	72	70	71	70	68	67			
0.80		100	90	91	85	85	82	98	90	90	85	85	81	88	84	83	81	82	80	78	77			
1.00		103	93	95	88	89	84	101	92	93	87	88	84	91	86	86	83	85	83	80	79			
1.25		107	95	99	91	93	87	105	94	97	90	92	87	95	89	90	86	88	85	83	82			
1.50		110	97	103	93	97	90	108	96	101	93	96	90	97	91	93	89	91	88	86	84			
2.00		115	100	108	97	103	94	112	99	106	96	101	93	102	94	98	92	95	91	89	88			
2.50		118	102	112	99	107	96	114	101	109	98	105	96	104	96	101	94	97	93	91	90			
3.00		120	103	114	100	110	98	116	102	112	99	107	97	106	98	103	96	99	95	93	91			
4.00		123	104	118	102	115	101	119	103	115	102	112	100	109	100	106	98	102	97	95	94			
5.00		125	105	121	104	118	102	120	104	117	103	114	101	111	101	109	100	103	98	97	95			
10.00		128	107	126	107	125	106	124	106	122	106	121	105	115	104	114	103	107	101	100	98			

