

東芝照明器具配光データシート




名 称	LED照明器具
形 名	LEDG-15855N (K)

光源	名 称	
	形 名	—
	光束	12500 lm × 1


前 面	ガラス (クリアー)
反射面	

保守率	良	0.78
	中	0.76
	否	0.72

効 率	F 	0.0 %
	F 	100 %
	F 	100 %
	器具光束	12500 lm

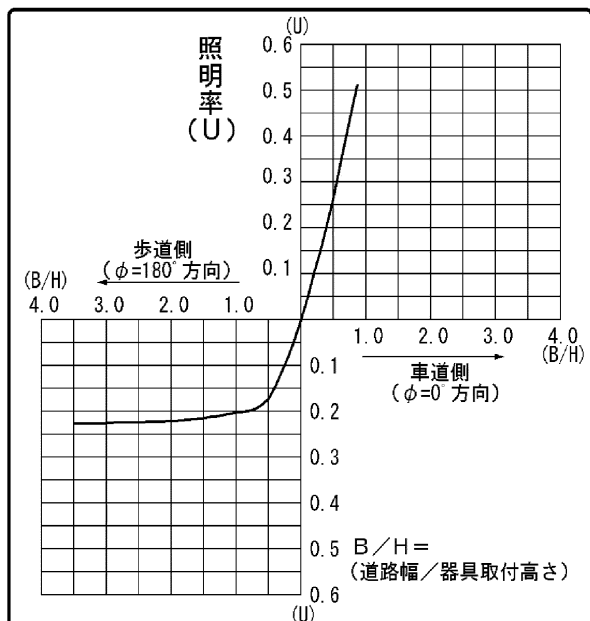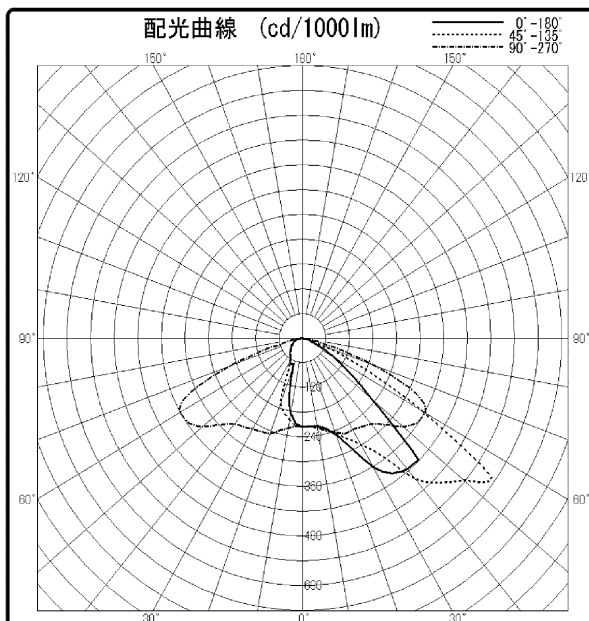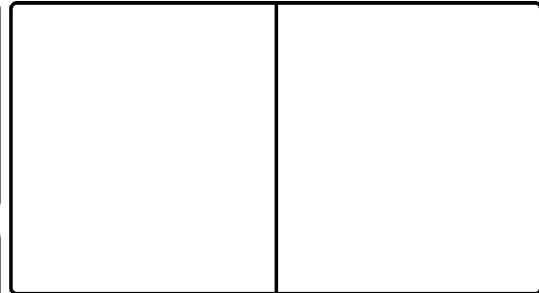

光度 (cd/1000lm)					
$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	215	215	215	215	215
10°	217	216	221	201	183
20°	250	245	247	169	66
30°	361	298	256	63	66
40°	415	446	271	51	52
50°	226	535	335	41	43
60°	87	344	361	33	30
70°	27	58	192	23	25
80°	6	9	6	5	2
90°	0	0	2	1	0
100°	0	0	0	0	0
110°	0	0	0	0	0
120°	0	0	0	0	0
130°	0	0	0	0	0
140°	0	0	0	0	0
150°	0	0	0	0	0
160°	0	0	0	0	0
170°	0	0	0	0	0
180°	0	0	0	0	0

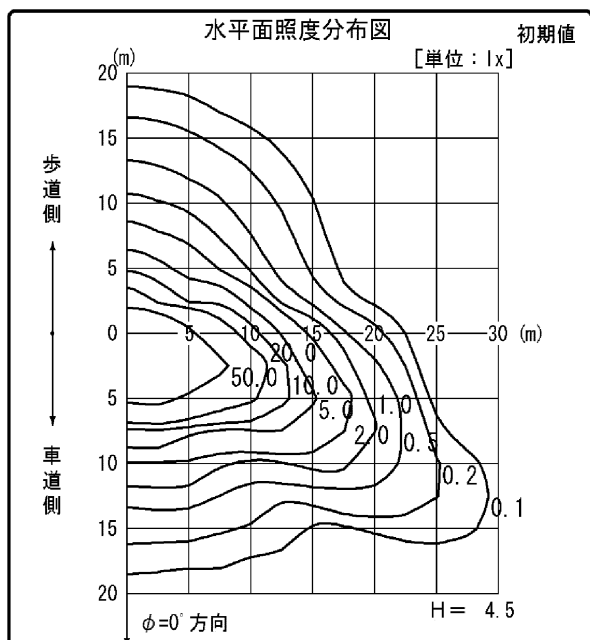

東芝照明器具配光データシート

名 称	LED照明器具	光 名 称		
形 名	LEDG-15855N (K)	形 名	—	
		光 束	12500 lm × 1	
備 考				

光度(cd/1000lm)																				
$\theta \backslash \phi$	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
0°	215	215	215	215	215	215	215	215	215	215	215	215	215	215	215	215	215	215	215	
5°	214	214	214	214	214	214	214	214	214	214	214	214	214	214	214	214	214	215	215	
10°	217	217	217	216	216	216	216	216	216	216	217	217	218	218	219	219	220	220	221	
15°	227	226	226	226	225	225	226	226	226	226	226	226	227	228	228	229	230	231	232	
20°	250	248	247	246	245	245	245	246	246	245	244	243	243	242	243	244	246	246	247	
25°	295	293	290	287	285	281	277	274	272	269	266	263	260	257	255	253	253	253	255	
30°	361	359	356	352	347	338	328	318	308	298	289	280	271	263	256	251	250	252	256	
35°	400	400	401	406	409	411	410	396	372	345	325	310	299	289	275	264	258	258	263	
40°	415	415	430	435	445	439	447	453	458	446	404	354	328	312	301	288	277	269	271	
45°	417	416	430	458	476	496	509	491	486	496	513	483	386	340	326	320	311	302	297	
50°	226	226	248	286	350	423	502	560	609	535	542	582	577	429	352	343	340	337	335	
55°	150	148	153	171	197	231	262	347	486	586	628	625	666	695	486	364	356	354	358	
60°	87	88	100	115	123	134	147	170	237	344	481	681	772	820	849	573	388	366	361	
65°	47	48	50	55	63	69	72	78	99	159	261	406	645	937	1038	872	551	370	321	
70°	27	28	31	35	39	42	45	45	48	58	112	246	443	649	720	720	462	264	192	
75°	14	14	14	15	17	20	20	24	26	26	47	119	252	367	364	346	227	114	64	
80°	6	6	6	6	7	8	8	10	10	9	14	40	92	102	75	32	13	8	6	
85°	1	1	1	1	1	1	2	2	1	1	2	6	6	3	2	2	2	2	2	
90°	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	2	
95°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
100°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
105°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
110°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
115°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
120°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
125°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
130°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
135°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
140°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
145°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
150°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
155°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
160°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
165°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
170°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
175°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
180°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

■ 東芝照明器具配光データシート

名 称	LED照明器具	光 名 称	
形 名	LEDG-15855N (K)	形 名	—
		源 光 束	12500 lm × 1

		光度 (cd/1000lm)																	
θ \ φ	φ	95°	100°	105°	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°	165°	170°	175°	180°
0°		215	215	215	215	215	215	215	215	215	215	215	215	215	215	215	215	215	215
5°		215	215	215	215	215	215	215	214	214	214	213	212	211	211	210	210	209	209
10°		221	222	222	220	218	214	210	205	201	197	194	191	188	186	185	184	184	183
15°		233	233	231	226	218	209	202	195	189	184	178	171	163	154	146	138	133	130
20°		249	248	242	230	218	207	198	187	169	142	111	85	73	68	67	66	66	66
25°		258	256	245	229	214	201	179	136	90	71	68	67	67	68	69	70	70	71
30°		262	261	245	225	208	179	114	68	63	64	66	68	69	70	69	68	67	66
35°		273	269	246	224	199	122	63	56	56	59	62	64	65	64	62	58	56	55
40°		282	274	247	223	166	69	53	50	51	52	53	54	53	53	52	52	52	52
45°		299	282	251	217	111	52	47	46	46	46	46	46	45	47	48	48	48	47
50°		331	295	255	198	67	46	43	41	41	41	41	41	41	41	42	42	43	43
55°		354	310	259	138	50	42	39	38	37	37	36	36	35	34	34	34	35	36
60°		332	283	213	60	41	37	35	34	33	32	31	30	29	29	29	30	30	30
65°		264	195	67	34	31	30	29	29	28	27	27	26	26	26	27	28	28	28
70°		125	43	21	19	19	20	21	22	23	24	23	22	23	23	24	25	26	25
75°		25	11	10	10	11	12	14	14	15	15	15	15	15	16	17	17	17	17
80°		5	5	5	5	5	6	6	5	5	6	6	6	4	3	3	2	2	2
85°		2	2	2	2	2	2	2	2	2	2	1	1	1	1	0	0	0	0
90°		2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	0	0
95°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
100°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
105°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
110°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
115°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
120°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
125°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
130°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
135°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
140°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
145°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
150°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
155°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
160°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0