

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKT407404HRN-LS9

効 率	F 	6 %
	F 	94 %
	F 	100 %
器具光束		4000 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

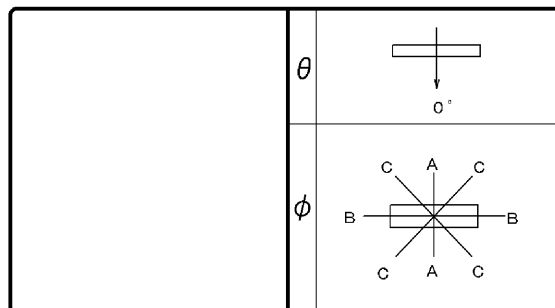

備考

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30			20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30			10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
0°	301	301	301		固有照明率 (×0.01)																							
10°	296	295	295																									
20°	282	278	280																									
30°	259	250	255																									
40°	229	215	222																									
50°	193	174	183																									
60°	155	128	142																									
70°	118	78	100																									
80°	83	30	62																									
90°	55	2	34																									
100°	33	1	18																									
110°	20	1	10																									
120°	12	1	7																									
130°	9	1	6																									
140°	7	1	5																									
150°	6	1	3																									
160°	4	0	2																									
170°	2	1	2																									
180°	1	1	1																									

