

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKT407693RN-LS9

効 率	F 	6 %
	F 	94 %
	F 	100 %
器具光束		6900 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

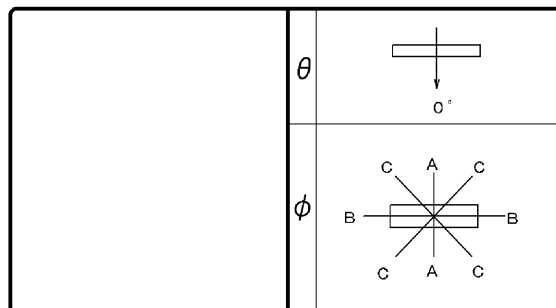

備考

光度 (cd/1000lm)				反射率 (%)	天井						壁						床					
θ	φ	A-A	B-B		80						70						50					
0°		301	301	301	70	50	30	70	50	30	50	30	50	30	50	30	30	10	30	10	10	0
10°		296	295	295	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
20°		282	278	280	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
30°		259	250	255	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
40°		229	215	222	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
50°		193	174	183	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
60°		155	128	142	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
70°		118	78	100	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
80°		83	30	62	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
90°		55	2	34	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
100°		33	1	18	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
110°		20	1	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
120°		12	1	7	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
130°		9	1	6	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
140°		7	1	5	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
150°		6	1	3	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
160°		4	0	2	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
170°		2	1	2	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
180°		1	1	1	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10

