

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKD15011FW-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1700 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔		
A-A	1.1	H
B-B	1.1	H

前 面	下面開放
反射面	白色

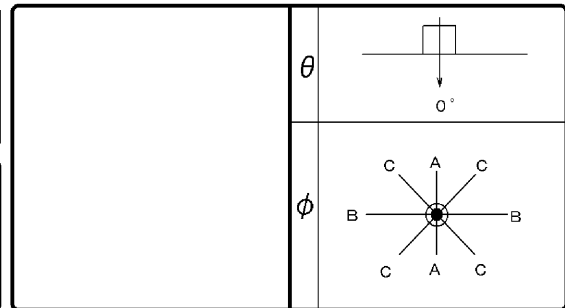

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	716		
10°	659		
20°	602		
30°	525		
40°	335		
50°	78		
60°	27		
70°	11		
80°	5		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		80	73	69	65	62	60	78	73	68	65	62	60	67	64	61	60	60	59	56	55			
0.80		92	84	82	77	75	72	90	83	81	76	75	72	79	75	74	71	73	71	68	67			
1.00		98	88	88	81	81	77	96	87	87	81	80	77	84	80	79	76	77	75	72	71			
1.25		104	92	94	86	88	82	101	91	93	86	86	82	90	84	84	81	82	80	77	76			
1.50		107	95	99	90	92	86	105	93	97	89	91	85	93	87	88	84	86	83	81	79			
2.00		113	98	106	94	100	91	110	97	103	94	98	91	99	92	95	89	92	88	86	85			
2.50		116	100	110	97	104	94	113	99	107	96	102	93	102	94	98	92	95	91	89	87			
3.00		119	102	113	99	108	96	115	100	110	98	105	95	104	96	101	94	97	93	91	89			
4.00		122	103	117	101	113	99	118	102	113	100	110	98	107	98	104	97	100	95	93	92			
5.00		123	104	119	102	116	101	119	103	116	101	112	100	109	99	107	98	101	96	95	93			
10.00		127	106	125	105	122	104	122	105	120	104	119	103	113	102	111	101	105	99	98	96			

