

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKR422403RN-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		3800 lm

保守率	良	0.86
	中	0.81
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

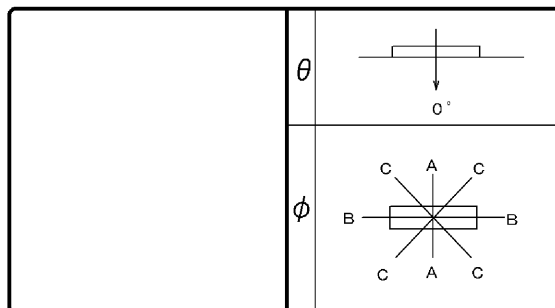

備考

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
						室指数	固有照明率 (×0.01)																					
0°	332	332	332	0.60	62	57	47	45	39	37	60	56	47	44	38	37	45	43	38	37	37	36	32	30				
10°	328	326	327	0.80	74	67	60	56	50	48	72	66	59	55	50	48	56	54	49	47	48	47	42	40				
20°	314	308	313	1.00	81	73	67	62	58	55	79	71	66	62	57	54	63	60	56	54	54	53	48	46				
30°	291	278	285	1.25	89	79	76	69	66	62	86	78	74	69	65	62	71	67	63	61	61	60	55	53				
40°	264	239	252	1.50	94	83	82	74	72	67	91	82	80	73	71	67	76	71	69	66	67	65	60	58				
50°	221	193	214	2.00	103	90	92	82	83	76	99	88	89	81	82	75	85	79	78	74	76	73	69	67				
60°	173	141	162	2.50	108	93	98	87	90	81	104	91	95	85	88	80	90	83	84	79	81	78	74	72				
70°	119	86	110	3.00	111	95	103	90	96	85	107	94	100	89	93	84	94	87	89	83	85	81	78	76				
80°	33	32	46	4.00	116	99	109	94	103	91	112	97	106	93	100	90	100	91	95	88	91	86	83	81				
90°	0	0	0	5.00	119	101	113	97	108	94	115	99	109	96	105	93	103	94	99	91	94	89	87	85				
100°	0	0	0	10.00	125	104	122	103	119	101	120	103	118	101	115	100	110	99	108	98	102	96	94	92				
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

