


■ 東芝ランプ 配光データシート

名 称	LEDランプ
形 名	LDR6N-W/100 W/2
光 束	850 lm × 1

保 守 率	良	1.00
	中	1.00
	否	1.00

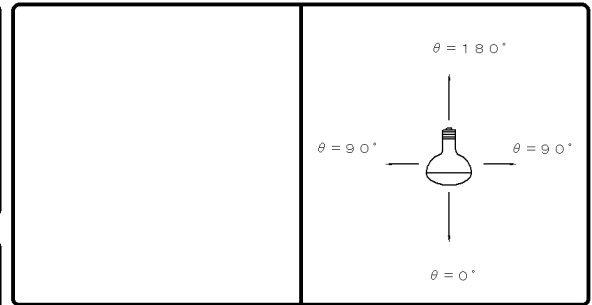

効 率	F		%
	F		%
	F	100	%
	器具 光束	850	lm

最大取付間隔	
A-A	0.48H
B-B	0.48H

備 考	
--------	--

光度 (cd/1000lm)			
0°	2822	25°	476
1°	2816	30°	312
2°	2796	35°	196
3°	2757	40°	112
4°	2693	45°	56
5°	2609	50°	26
6°	2506	55°	14
7°	2392	60°	9
8°	2271	65°	7
9°	2144	70°	5
10°	2012	75°	2
11°	1877	80°	2
12°	1739	85°	1
13°	1601	90°	0
14°	1467		
15°	1338		
16°	1215		
17°	1100		
18°	989		
19°	884		
20°	786		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		照 明 率 (×0.01)																						
0.60		102	94	94	90	90	87	101	93	94	89	89	87	92	89	89	86	88	86	85	84			
0.80		112	101	105	98	100	96	110	101	104	98	100	96	102	97	98	95	97	95	94	93			
1.00		113	102	106	99	101	96	111	101	105	98	101	96	103	97	99	95	97	95	93	92			
1.25		116	103	108	99	103	97	113	102	107	99	102	97	104	98	100	96	98	95	93	92			
1.50		118	104	111	101	106	98	115	103	109	100	105	98	106	99	102	97	99	96	95	93			
2.00		121	105	115	103	110	100	118	104	113	102	108	100	108	100	105	99	101	98	96	95			
2.50		123	106	118	104	113	102	120	105	115	103	111	101	110	102	107	100	103	99	97	96			
3.00		125	107	120	105	116	103	121	106	117	104	113	103	112	103	109	101	104	100	98	97			
4.00		128	109	124	107	120	106	124	108	120	106	117	105	114	105	112	103	107	102	101	99			
5.00		130	110	126	109	124	108	125	109	123	108	120	107	116	106	114	105	109	103	102	100			
10.00		134	112	132	111	131	111	129	111	128	110	127	110	120	108	119	108	113	106	106	104			

