

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKT407403L-LS9

効 率	F 	5 %
	F 	95 %
	F 	100 %
器具光束		3600 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

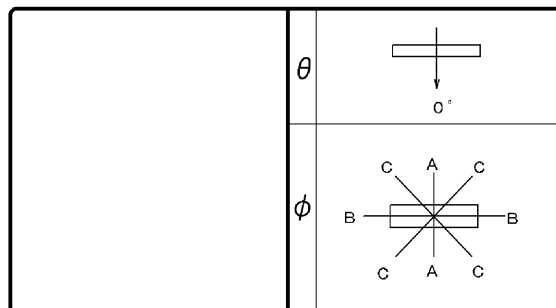

備考

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
					室指数	固有照明率 (×0.01)																						
0°	316	316	316	0.60	61	56	46	44	38	37	59	54	45	43	37	36	43	42	36	35	35	34	30	28				
10°	311	310	311	0.80	73	66	58	55	49	47	70	64	57	54	48	46	54	52	47	45	45	44	39	37				
20°	294	289	292	1.00	80	72	66	61	56	53	77	70	64	60	55	52	61	57	53	51	51	50	45	43				
30°	271	260	266	1.25	87	78	74	68	64	60	84	76	72	66	63	59	68	64	60	58	58	56	51	49				
40°	237	221	229	1.50	92	81	80	72	70	65	89	79	77	71	68	64	73	68	66	62	63	61	56	53				
50°	199	177	188	2.00	101	88	89	80	80	73	97	85	86	78	78	72	81	75	75	70	71	68	64	61				
60°	158	127	144	2.50	105	91	95	84	87	78	101	89	92	83	85	77	86	80	80	75	76	73	69	66				
70°	117	75	99	3.00	109	93	100	88	92	82	104	91	96	86	90	81	90	83	85	79	80	76	72	70				
80°	76	24	56	4.00	114	97	106	92	100	88	109	95	102	90	97	86	95	87	91	84	85	81	78	75				
90°	46	1	29	5.00	117	99	110	95	105	91	112	97	106	93	101	90	98	90	94	87	89	84	81	78				
100°	29	1	15	10.00	123	103	119	100	116	98	117	101	114	99	111	97	106	95	103	94	96	91	88	85				
110°	17	1	8																									
120°	10	1	6																									
130°	7	1	4																									
140°	5	1	3																									
150°	3	1	2																									
160°	1	1	1																									
170°	1	1	1																									
180°	1	1	1																									

