

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKT407403N-LS9

効 率	F 	5 %
	F 	95 %
	F 	100 %
器具光束		4000 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	カバー (乳白)
反射面	塗装 (白)

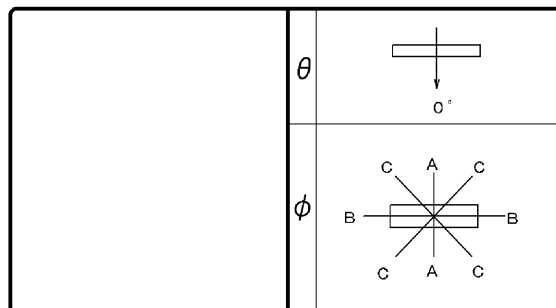

備考

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
					室指数																							
0°	316	316	316	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
10°	311	310	311																									
20°	294	289	292																									
30°	271	260	266																									
40°	237	221	229																									
50°	199	177	188																									
60°	158	127	144																									
70°	117	75	99																									
80°	76	24	56																									
90°	46	1	29																									
100°	29	1	15																									
110°	17	1	8																									
120°	10	1	6																									
130°	7	1	4																									
140°	5	1	3																									
150°	3	1	2																									
160°	1	1	1																									
170°	1	1	1																									
180°	1	1	1																									

