


# 東芝照明器具配光データシート

|     |                  |
|-----|------------------|
| 名 称 | 東芝LED照明器具        |
| 形 名 | LEKT407523WW-LD9 |

|      |                                                                                     |         |
|------|-------------------------------------------------------------------------------------|---------|
| 効 率  | F  | 5 %     |
|      | F  | 95 %    |
|      | F  | 100 %   |
| 器具光束 |                                                                                     | 4750 lm |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.88 |
|     | 中 | 0.86 |
|     | 否 | 0.81 |

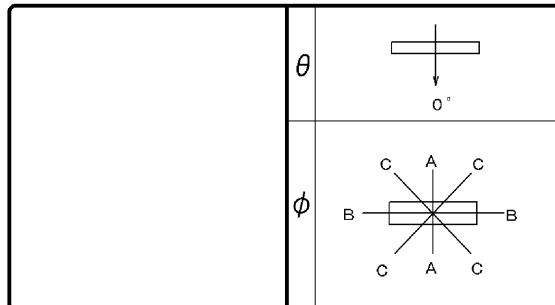

|     |          |
|-----|----------|
| 前 面 | カバー (乳白) |
| 反射面 | 塗装 (白)   |

|        |       |
|--------|-------|
| 最大取付間隔 |       |
| A-A    | 1.3 H |
| B-B    | 1.2 H |

備考

| 光度 (cd/1000lm) |     |     |     |
|----------------|-----|-----|-----|
| θ \ φ          | A-A | B-B | C-C |
| 0°             | 316 | 316 | 316 |
| 10°            | 311 | 310 | 311 |
| 20°            | 294 | 289 | 292 |
| 30°            | 271 | 260 | 266 |
| 40°            | 237 | 221 | 229 |
| 50°            | 199 | 177 | 188 |
| 60°            | 158 | 127 | 144 |
| 70°            | 117 | 75  | 99  |
| 80°            | 76  | 24  | 56  |
| 90°            | 46  | 1   | 29  |
| 100°           | 29  | 1   | 15  |
| 110°           | 17  | 1   | 8   |
| 120°           | 10  | 1   | 6   |
| 130°           | 7   | 1   | 4   |
| 140°           | 5   | 1   | 3   |
| 150°           | 3   | 1   | 2   |
| 160°           | 1   | 1   | 1   |
| 170°           | 1   | 1   | 1   |
| 180°           | 1   | 1   | 1   |

| 反射率<br>(%) | 天井 | 80            |     |     |     |     |    | 70  |     |     |    |     |    | 50  |    |     |    |    |    | 30 |    | 20 | 0 |
|------------|----|---------------|-----|-----|-----|-----|----|-----|-----|-----|----|-----|----|-----|----|-----|----|----|----|----|----|----|---|
|            | 壁  | 70            |     | 50  |     | 30  |    | 70  |     | 50  |    | 30  |    | 50  |    | 30  |    | 30 |    | 10 | 0  |    |   |
|            | 床  | 30            | 10  | 30  | 10  | 30  | 10 | 30  | 10  | 30  | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 10 | 0  |    |   |
| 室指数        |    | 固有照明率 (×0.01) |     |     |     |     |    |     |     |     |    |     |    |     |    |     |    |    |    |    |    |    |   |
| 0.60       |    | 61            | 56  | 46  | 44  | 38  | 37 | 59  | 54  | 45  | 43 | 37  | 36 | 43  | 42 | 36  | 35 | 35 | 34 | 30 | 28 |    |   |
| 0.80       |    | 73            | 66  | 58  | 55  | 49  | 47 | 70  | 64  | 57  | 54 | 48  | 46 | 54  | 52 | 47  | 45 | 45 | 44 | 39 | 37 |    |   |
| 1.00       |    | 80            | 72  | 66  | 61  | 56  | 53 | 77  | 70  | 64  | 60 | 55  | 52 | 61  | 57 | 53  | 51 | 51 | 50 | 45 | 43 |    |   |
| 1.25       |    | 87            | 78  | 74  | 68  | 64  | 60 | 84  | 76  | 72  | 66 | 63  | 59 | 68  | 64 | 60  | 58 | 58 | 56 | 51 | 49 |    |   |
| 1.50       |    | 92            | 81  | 80  | 72  | 70  | 65 | 89  | 79  | 77  | 71 | 68  | 64 | 73  | 68 | 66  | 62 | 63 | 61 | 56 | 53 |    |   |
| 2.00       |    | 101           | 88  | 89  | 80  | 80  | 73 | 97  | 85  | 86  | 78 | 78  | 72 | 81  | 75 | 75  | 70 | 71 | 68 | 64 | 61 |    |   |
| 2.50       |    | 105           | 91  | 95  | 84  | 87  | 78 | 101 | 89  | 92  | 83 | 85  | 77 | 86  | 80 | 80  | 75 | 76 | 73 | 69 | 66 |    |   |
| 3.00       |    | 109           | 93  | 100 | 88  | 92  | 82 | 104 | 91  | 96  | 86 | 90  | 81 | 90  | 83 | 85  | 79 | 80 | 76 | 72 | 70 |    |   |
| 4.00       |    | 114           | 97  | 106 | 92  | 100 | 88 | 109 | 95  | 102 | 90 | 97  | 86 | 95  | 87 | 91  | 84 | 85 | 81 | 78 | 75 |    |   |
| 5.00       |    | 117           | 99  | 110 | 95  | 105 | 91 | 112 | 97  | 106 | 93 | 101 | 90 | 98  | 90 | 94  | 87 | 89 | 84 | 81 | 78 |    |   |
| 10.00      |    | 123           | 103 | 119 | 100 | 116 | 98 | 117 | 101 | 114 | 99 | 111 | 97 | 106 | 95 | 103 | 94 | 96 | 91 | 88 | 85 |    |   |

