


東芝照明器具配光データシート

名 称	東芝LED照明器具
形 名	LEKT407523WW-LS9

効 率	F 半	5 %
	F 半	95 %
	F 全	100 %
器具光束		4750 lm

保守率	良	0.88
	中	0.86
	否	0.81

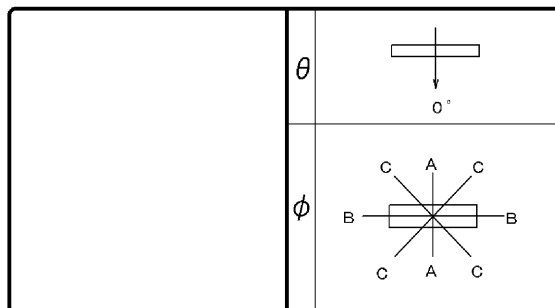

前 面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)				反射率 (%)	天井			70			50			30			20			0
θ	φ	A-A	B-B		壁	70	50	30	70	50	30	50	30	30	10	0	30	10	0	
0°		316	316	316	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
10°		311	310	311	固有照明率 (×0.01)															
20°		294	289	292	0.60	61	56	46	44	38	37	59	54	43	37	36	43	42	36	35
30°		271	260	266	0.80	73	66	58	55	49	47	70	64	57	54	48	46	54	52	47
40°		237	221	229	1.00	80	72	66	61	56	53	77	70	64	60	55	52	61	57	53
50°		199	177	188	1.25	87	78	74	68	64	60	84	76	72	66	63	59	68	64	60
60°		158	127	144	1.50	92	81	80	72	70	65	89	79	77	71	68	64	73	68	66
70°		117	75	99	2.00	101	88	89	80	80	73	97	85	86	78	78	72	81	75	75
80°		76	24	56	2.50	105	91	95	84	87	78	101	89	92	83	85	77	86	80	80
90°		46	1	29	3.00	109	93	100	88	92	82	104	91	96	86	90	81	90	83	85
100°		29	1	15	4.00	114	97	106	92	100	88	109	95	102	90	97	86	95	87	91
110°		17	1	8	5.00	117	99	110	95	105	91	112	97	106	93	101	90	98	90	94
120°		10	1	6	10.00	123	103	119	100	116	98	117	101	114	99	111	97	106	95	103
130°		7	1	4																
140°		5	1	3																
150°		3	1	2																
160°		1	1	1																
170°		1	1	1																
180°		1	1	1																

