


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEKT807503W-LD2

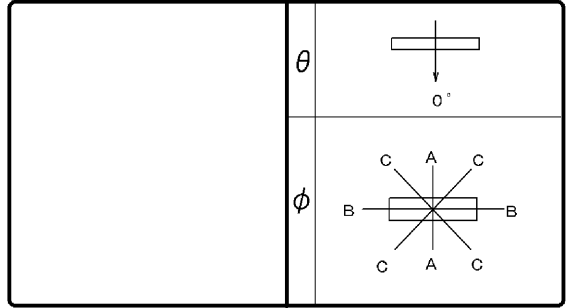

効率	F	5 %
	F	95 %
	F	100 %
	器具光束	4750 lm

保守率	良	0.88
	中	0.86
	否	0.81

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	316	316	316
10°	311	310	311
20°	294	289	292
30°	271	260	266
40°	237	221	229
50°	199	177	188
60°	158	127	144
70°	117	75	99
80°	76	24	56
90°	46	1	29
100°	29	1	15
110°	17	1	8
120°	10	1	6
130°	7	1	4
140°	5	1	3
150°	3	1	2
160°	1	1	1
170°	1	1	1
180°	1	1	1

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		30		10		10		30		10		10		0																
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10															
室指数	固有照明率 ($\times 0.01$)																																															
0.60	61	56	46	44	38	37	59	54	45	43	37	36	43	42	36	35	35	34	30	28																												
0.80	73	66	58	55	49	47	70	64	57	54	48	46	54	52	47	45	45	44	39	37																												
1.00	80	72	66	61	56	53	77	70	64	60	55	52	61	57	53	51	51	50	45	43																												
1.25	87	78	74	68	64	60	84	76	72	66	63	59	68	64	60	58	58	56	51	49																												
1.50	92	81	80	72	70	65	89	79	77	71	68	64	73	68	66	62	63	61	56	53																												
2.00	101	88	89	80	80	73	97	85	86	78	78	72	81	75	75	70	71	68	64	61																												
2.50	105	91	95	84	87	78	101	89	92	83	85	77	86	80	80	75	76	73	69	66																												
3.00	109	93	100	88	92	82	104	91	96	86	90	81	90	83	85	79	80	76	72	70																												
4.00	114	97	106	92	100	88	109	95	102	90	97	86	95	87	91	84	85	81	78	75																												
5.00	117	99	110	95	105	91	112	97	106	93	101	90	98	90	94	87	89	84	81	78																												
10.00	123	103	119	100	116	98	117	101	114	99	111	97	106	95	103	94	96	91	88	85																												

