

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD87054WW (W) -LS

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		720 lm

保守率	良	0.69
	中	0.67
	否	0.63

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	
反射面	

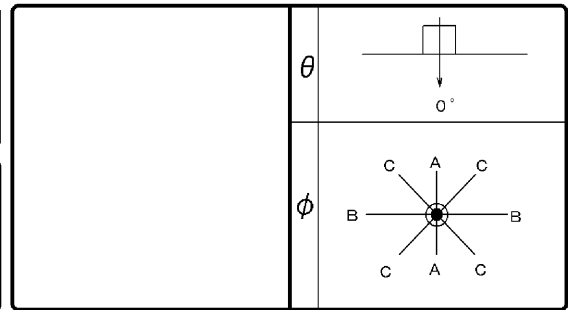

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	345		
10°	340		
20°	323		
30°	296		
40°	259		
50°	213		
60°	161		
70°	101		
80°	25		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	1		
150°	1		
160°	1		
170°	1		
180°	2		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		63	58	48	46	40	39	61	56	48	45	39	38	46	44	39	38	38	37	33	31			
0.80		75	68	61	57	52	50	73	67	60	56	51	49	58	55	50	49	49	48	43	41			
1.00		82	74	69	64	59	56	80	73	67	63	58	56	65	61	57	55	56	54	49	47			
1.25		90	80	77	71	68	64	87	79	75	70	67	63	72	68	65	62	63	61	57	54			
1.50		96	84	83	75	74	69	92	83	81	74	73	68	77	73	70	67	68	66	62	60			
2.00		104	90	93	83	85	77	100	89	91	82	83	77	86	80	80	75	77	74	70	68			
2.50		109	94	99	88	92	83	105	92	97	87	90	82	91	85	86	80	82	79	75	73			
3.00		112	96	104	91	97	87	108	95	101	90	95	86	95	88	90	84	86	83	79	77			
4.00		117	99	110	95	104	92	113	98	107	94	102	91	101	92	96	89	92	87	85	82			
5.00		120	101	114	98	109	95	115	100	110	97	106	94	104	95	100	92	95	90	88	86			
10.00		126	105	123	103	120	102	121	104	118	102	116	101	111	100	109	99	102	97	95	93			

