

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDL-09402L2-LS9

効 率	F 	4 %
	F 	96 %
	F 	100 %
	器具 光束	1690 lm

保守 率	良	0.69
	中	0.67
	否	0.63

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	

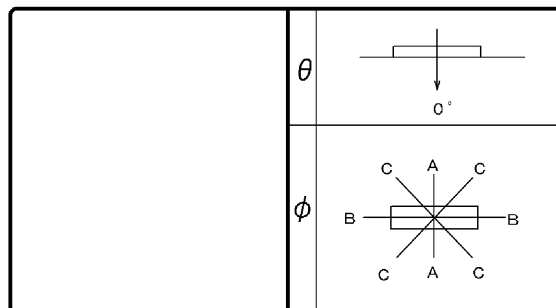

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
						固有照明率 (×0.01)																						
0°	362	362	362	室指数	0.60																							
10°	354	354	355		0.80																							
20°	333	333	333		1.00																							
30°	297	297	297		1.25																							
40°	247	247	249		1.50																							
50°	192	190	192		2.00																							
60°	136	132	136		2.50																							
70°	86	77	83		3.00																							
80°	43	29	37		4.00																							
90°	20	2	13		5.00																							
100°	19	2	12		10.00																							
110°	15	1	8																									
120°	11	1	6																									
130°	5	1	6																									
140°	4	1	5																									
150°	3	2	3																									
160°	3	2	2																									
170°	2	2	2																									
180°	2	2	2																									

