

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDL-06402L2-LS9

効 率	F 	4 %
	F 	96 %
	F 	100 %
器具光束		1130 lm

保守率	良	0.69
	中	0.67
	否	0.63

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	

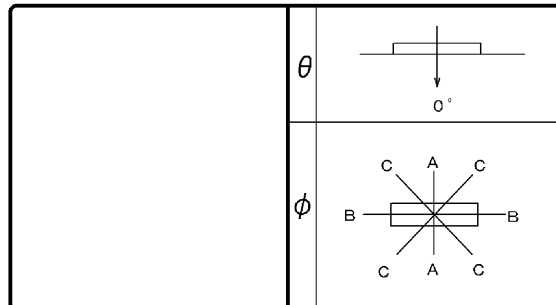

備考	
----	--

光度 (cd/1000lm)				反射率 (%)	天井						壁						床					
θ	φ	A-A	B-B		80						70						50					
0°		362	362	362	70	50	30	70	50	30	50	30	50	30	50	30	30	10	30	10	10	0
10°		354	354	355	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
20°		333	333	333	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
30°		297	297	297	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
40°		247	247	249	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
50°		192	190	192	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
60°		136	132	136	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
70°		86	77	83	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
80°		44	29	37	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
90°		20	2	13	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
100°		19	2	12	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
110°		15	1	8	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
120°		11	1	6	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
130°		5	1	6	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
140°		4	1	5	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
150°		4	2	3	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
160°		3	2	2	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
170°		2	2	2	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
180°		2	2	2	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10

