

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDL-06402WW-LS9

効 率	F 	4 %
	F 	96 %
	F 	100 %
	器具 光束	1190 lm

保守 率	良	0.69
	中	0.67
	否	0.63

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	

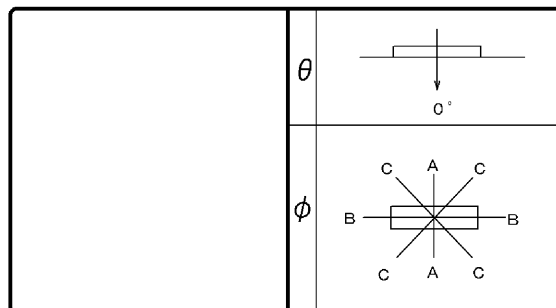

備考

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70						50						30						10	0			
						70		50		30		70		50		30		50		30		30		10	0			
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
				室指数	固有照明率 (×0.01)																							
0°				0.60	63	58	49	47	41	40	61	57	48	46	40	39	47	45	39	38	38	38	33	32				
10°				0.80	75	68	62	58	53	50	73	67	60	57	52	50	58	55	50	49	49	48	43	41				
20°				1.00	82	74	69	64	60	57	80	72	67	63	59	56	64	61	57	55	55	54	49	47				
30°				1.25	90	80	77	71	68	64	87	78	75	69	67	63	71	67	64	61	62	60	56	53				
40°				1.50	95	84	83	75	74	68	91	82	80	74	72	68	76	71	69	66	67	65	60	58				
50°				2.00	103	90	92	83	84	77	99	88	90	81	82	76	84	79	78	74	75	72	68	65				
60°				2.50	107	93	98	87	90	82	103	91	95	85	88	80	89	82	84	78	80	76	73	70				
70°				3.00	111	95	103	90	96	85	107	93	99	88	93	84	93	86	88	82	83	80	76	74				
80°				4.00	115	98	109	94	103	90	111	96	105	92	99	89	98	89	94	87	88	84	81	78				
90°				5.00	118	100	112	96	107	93	113	98	108	95	104	92	101	92	97	89	91	87	84	81				
100°				10.00	124	103	121	102	117	100	119	102	116	100	113	98	107	97	105	96	98	93	91	88				
110°																												
120°																												
130°																												
140°																												
150°																												
160°																												
170°																												
180°																												

