

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-60031MWWV+LEK-4240 16A01D

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具 光束		6100 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	下面開放
反射面	銀色梨地仕上げ

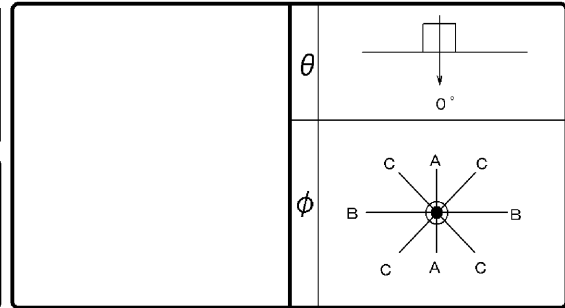

備考	LEDD-60031MWWV+LEK-424016A01D
----	-------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	634		
10°	648		
20°	645		
30°	510		
40°	285		
50°	115		
60°	38		
70°	6		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		80	73	69	65	62	60	78	72	68	65	62	60	66	64	61	59	60	59	56	55			
0.80		92	84	82	77	75	72	90	83	81	76	74	72	79	75	73	71	72	71	68	67			
1.00		98	88	88	81	81	77	95	87	86	81	80	76	84	79	78	76	77	75	72	71			
1.25		103	92	94	86	87	82	101	91	92	85	86	81	89	84	84	81	82	80	77	76			
1.50		107	94	98	89	92	86	104	93	97	89	91	85	93	87	88	84	86	83	81	79			
2.00		113	98	106	94	100	91	110	97	103	94	98	91	99	92	95	89	92	88	86	84			
2.50		116	100	110	97	104	94	113	99	107	96	102	93	102	94	98	92	95	91	89	87			
3.00		119	102	113	99	108	96	115	101	110	98	105	95	104	96	101	94	97	93	91	89			
4.00		122	103	117	101	113	99	118	102	114	100	110	98	107	98	105	97	100	95	93	92			
5.00		123	104	119	102	116	101	119	103	116	101	113	100	109	99	107	98	102	97	95	93			
10.00		127	106	125	105	123	104	122	105	121	104	119	103	113	102	112	101	105	99	98	96			

