

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKT771112MN-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束	10900 lm	

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	
反射面	塗装 (白)

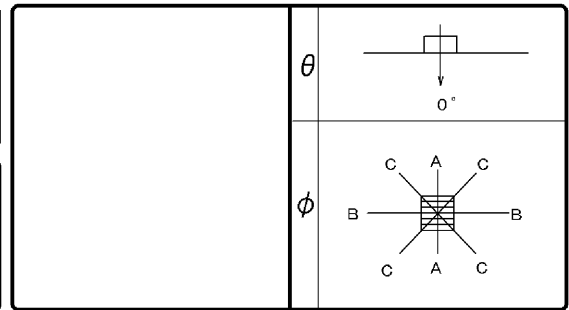

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	345	345	345
10°	340	335	338
20°	324	311	318
30°	299	276	287
40°	267	233	248
50°	231	184	202
60°	185	132	154
70°	132	78	98
80°	69	29	42
90°	0	4	4
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		62	57	48	45	39	38	60	56	47	45	39	38	46	44	38	37	37	37	32	30		
0.80		74	68	60	56	51	49	72	66	59	56	50	48	57	54	49	48	48	47	42	40		
1.00		82	73	68	63	58	55	79	72	66	62	57	55	64	60	56	54	54	53	48	46		
1.25		89	79	76	70	66	62	86	78	74	69	65	62	71	67	63	61	62	60	55	53		
1.50		94	83	82	74	73	67	91	82	80	73	71	67	76	71	69	66	67	65	60	58		
2.00		103	90	92	82	83	76	99	88	89	81	82	75	85	79	78	74	75	73	69	66		
2.50		108	93	98	87	90	81	104	91	95	85	88	80	90	83	84	79	81	77	74	72		
3.00		111	95	103	90	95	85	107	94	100	89	93	84	94	87	89	83	85	81	78	76		
4.00		116	99	109	94	103	90	112	97	106	93	100	90	99	91	95	88	90	86	83	81		
5.00		119	101	113	97	108	94	115	99	109	96	105	93	103	93	99	91	94	89	86	84		
10.00		125	104	122	103	119	101	120	103	117	101	115	100	110	99	108	98	101	96	94	92		

