

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKT771112ML-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束	10500 lm	

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	
反射面	塗装 (白)

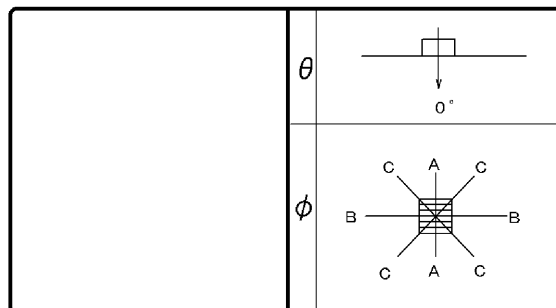

備考

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50		30		10	0	
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
					固有照明率 (×0.01)																									
室指数																														
0°	345	345	345	0.60	62	57	48	45	39	38	60	56	47	45	39	38	46	44	38	37	37	37	32	30						
10°	340	335	338	0.80	74	68	60	56	51	49	72	66	59	56	50	48	57	54	49	48	48	47	42	40						
20°	324	311	318	1.00	82	73	68	63	58	55	79	72	66	62	57	55	64	60	56	54	54	53	48	46						
30°	299	276	287	1.25	89	79	76	70	66	62	86	78	74	69	65	62	71	67	63	61	62	60	55	53						
40°	267	233	248	1.50	94	83	82	74	73	67	91	82	80	73	71	67	76	71	69	66	67	65	60	58						
50°	231	184	202	2.00	103	90	92	82	83	76	99	88	89	81	82	75	85	79	78	74	75	73	69	66						
60°	185	132	154	2.50	108	93	98	87	90	81	104	91	95	85	88	80	90	83	84	79	81	77	74	72						
70°	132	78	98	3.00	111	95	103	90	95	85	107	94	100	89	93	84	94	87	89	83	85	81	78	76						
80°	69	29	42	4.00	116	99	109	94	103	90	112	97	106	93	100	90	99	91	95	88	90	86	83	81						
90°	0	4	4	5.00	119	101	113	97	108	94	115	99	109	96	105	93	103	93	99	91	94	89	86	84						
100°	0	0	0	10.00	125	104	122	103	119	101	120	103	117	101	115	100	110	99	108	98	101	96	94	92						
110°	0	0	0																											
120°	0	0	0																											
130°	0	0	0																											
140°	0	0	0																											
150°	0	0	0																											
160°	0	0	0																											
170°	0	0	0																											
180°	0	0	0																											

