

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKR760112MMW-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		10700 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	
反射面	塗装 (白)

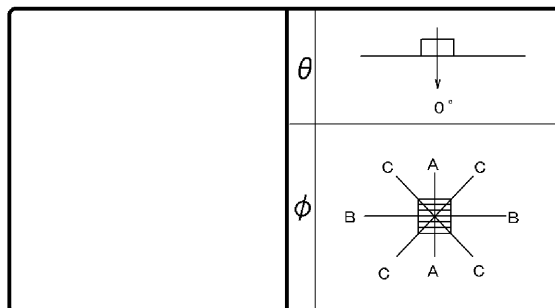

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	362	362	362
10°	358	356	357
20°	345	334	340
30°	324	300	314
40°	283	256	277
50°	232	205	223
60°	163	148	162
70°	46	89	89
80°	7	33	9
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																						
0.60	64	59	50	47	41	40	62	57	49	47	41	40	47	46	40	39	39	39	34	33			
0.80	76	69	63	59	54	51	74	68	61	58	53	51	59	57	52	50	51	50	45	43			
1.00	84	75	70	65	61	58	81	74	69	64	60	58	66	63	59	57	58	56	52	50			
1.25	92	81	79	72	70	65	89	80	77	71	69	65	74	70	67	64	65	63	59	57			
1.50	97	85	85	77	76	71	94	84	83	76	75	70	79	74	72	69	70	68	64	62			
2.00	105	91	95	85	87	79	102	90	92	84	85	79	88	82	82	77	79	76	72	70			
2.50	110	95	101	89	93	84	106	93	98	88	91	83	93	86	87	82	84	81	77	75			
3.00	113	97	105	92	98	88	109	96	102	91	96	87	97	89	92	86	88	84	81	79			
4.00	118	100	111	96	106	93	113	99	108	95	103	92	102	93	98	90	93	89	86	84			
5.00	120	102	115	99	110	96	116	100	111	97	107	95	105	95	101	93	96	91	89	87			
10.00	126	105	123	103	120	102	121	104	118	102	116	101	111	100	109	99	103	97	95	93			

