

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKR761112ML-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		10000 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	
反射面	塗装 (白)

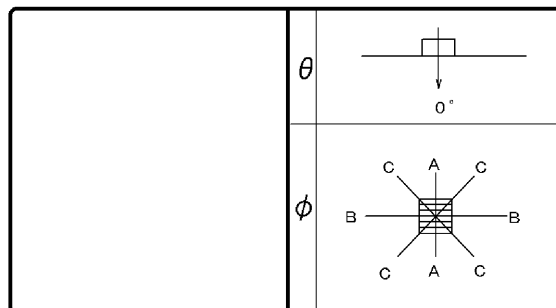

備考	
----	--

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50	30	10	0	
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
						固有照明率 (×0.01)																						
室指数																												
0°	393	393	393		0.60	65	60	51	49	43	42	63	59	50	48	43	41	49	47	42	41	41	40	36	34			
10°	388	380	384		0.80	78	71	64	60	55	53	76	69	63	60	55	53	61	58	54	52	53	51	47	45			
20°	374	348	360		1.00	85	76	72	67	63	60	83	75	70	66	62	59	68	64	61	58	59	58	53	51			
30°	351	303	324		1.25	93	82	80	74	71	67	90	81	79	73	70	66	75	71	68	66	67	65	60	58			
40°	307	249	277		1.50	98	86	86	78	78	72	95	85	84	77	76	71	81	75	74	70	72	69	65	63			
50°	251	189	215		2.00	106	92	96	86	88	80	102	91	93	85	86	80	89	83	83	78	80	77	74	72			
60°	176	126	148		2.50	110	95	102	90	94	85	107	94	99	89	92	84	94	87	89	83	85	82	78	76			
70°	51	64	75		3.00	114	98	106	93	99	89	110	96	103	92	97	88	97	90	93	86	89	85	82	80			
80°	9	22	19		4.00	118	100	112	97	106	93	114	99	108	96	104	93	102	94	98	91	94	89	87	85			
90°	0	0	0		5.00	121	102	115	99	111	96	116	101	112	98	108	95	105	96	102	94	97	92	89	88			
100°	0	0	0		10.00	126	105	123	104	120	102	121	104	119	103	116	101	111	100	109	99	103	97	96	94			
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

