

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEER-42302F-BD9+LEEM-40694W-HG

効 率	F 	2 %
	F 	98 %
	F 	100 %
	器具 光束	6300 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

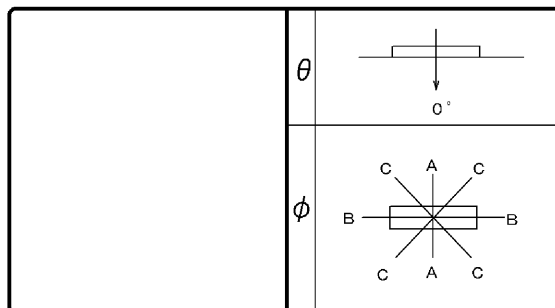

備 考	LEER-42302F-BD9+LEEM-40694W-HG
--------	--------------------------------

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
						固有照明率 (×0.01)																						
0°	313	313	313	室指数																								
10°	308	306	308	0.60	60	56	46	44	37	36	59	54	45	43	37	36	43	42	36	35	35	34	30	28				
20°	294	289	292	0.80	72	66	58	54	48	46	70	64	56	53	47	46	54	52	46	45	45	44	39	37				
30°	271	260	266	1.00	79	71	65	60	55	52	77	70	63	59	54	52	61	58	53	51	51	50	45	43				
40°	240	224	233	1.25	87	77	73	67	63	59	84	76	71	66	62	59	68	64	60	58	58	56	52	49				
50°	204	181	193	1.50	92	81	79	72	69	64	89	79	77	71	68	64	73	68	66	62	63	61	56	54				
60°	166	133	150	2.00	101	88	89	80	80	73	97	86	86	78	78	72	82	76	75	71	72	69	65	62				
70°	130	81	110	2.50	105	91	95	84	87	78	101	89	92	83	84	77	87	80	81	75	77	74	70	67				
80°	89	31	70	3.00	109	94	100	87	92	82	105	92	97	86	90	81	91	84	85	79	81	78	74	71				
90°	48	1	31	4.00	114	97	106	92	100	88	110	95	103	91	97	86	96	88	91	84	87	83	79	77				
100°	0	0	0	5.00	117	99	110	95	104	91	112	97	107	93	101	90	100	91	95	88	90	86	82	80				
110°	0	0	0	10.00	123	103	120	101	116	99	118	102	115	99	112	97	107	97	105	95	98	93	90	88				
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

