

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEET-81201F-BD2+LEEM-80643N-01

効 率	F 	6 %
	F 	94 %
	F 	100 %
器具光束		6400 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

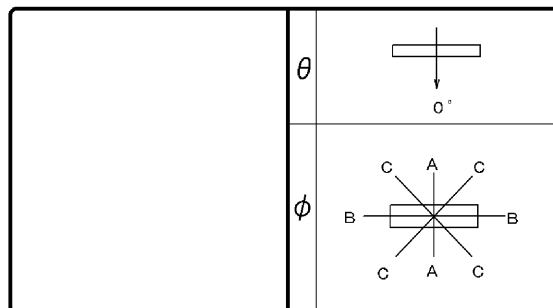

備考	LEET-81201F-BD2+LEEM-80643N-01
----	--------------------------------

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30			20	0			
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50			30			10	0
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
0°	301	301	301		固有照明率 (×0.01)																										
10°	296	295	296																												
20°	283	278	280																												
30°	260	251	256																												
40°	231	215	224																												
50°	196	174	185																												
60°	158	128	144																												
70°	120	78	102																												
80°	85	30	64																												
90°	56	2	35																												
100°	34	1	18																												
110°	20	1	10																												
120°	13	1	7																												
130°	8	1	0																												
140°	0	0	0																												
150°	0	0	0																												
160°	0	0	0																												
170°	1	1	0																												
180°	1	1	1																												

