


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEDG-18901M-LS9 + LEEU-2506N-04

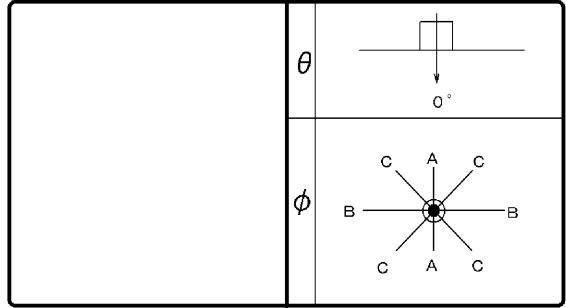

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	2150 lm

保守 率	良	0.77
	中	0.72
	否	0.68

前面	カバー (透明)
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	LEDG-18901M-LS9 + LEEU-2506N-04
----	---------------------------------

$\theta \setminus \phi$	A-A	B-B	C-C
0°	431		
10°	430		
20°	417		
30°	380		
40°	310		
50°	213		
60°	101		
70°	35		
80°	14		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	固有照明率 (×0.01)																																				
0.60	69	63	56	53	48	46	67	62	55	52	47	46	53	51	47	45	46	45	41	39																	
0.80	82	74	69	65	61	58	80	73	68	64	60	58	66	63	59	57	58	57	53	51																	
1.00	89	80	76	71	68	64	86	78	75	70	67	64	72	69	66	63	64	63	59	57																	
1.25	96	85	84	77	76	71	93	84	83	77	75	71	80	75	73	70	71	69	65	64																	
1.50	101	89	90	82	82	76	98	87	88	81	81	76	84	79	78	75	76	74	70	68																	
2.00	108	94	99	89	92	84	105	93	97	88	90	83	92	86	87	82	84	81	78	76																	
2.50	112	97	104	92	98	88	109	96	101	91	96	87	96	89	92	86	88	85	82	80																	
3.00	115	99	108	95	102	91	111	98	105	94	100	90	100	92	95	89	91	88	85	83																	
4.00	119	101	113	98	108	95	115	100	110	97	106	94	104	95	100	93	96	91	89	87																	
5.00	121	103	117	100	112	98	117	101	113	99	109	97	106	97	103	95	98	93	91	89																	
10.00	126	105	123	104	121	103	121	104	119	103	117	102	111	101	103	98	96	94																			

