


# 東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEDG-18901M-LS9 + LEEU-2505L2-04

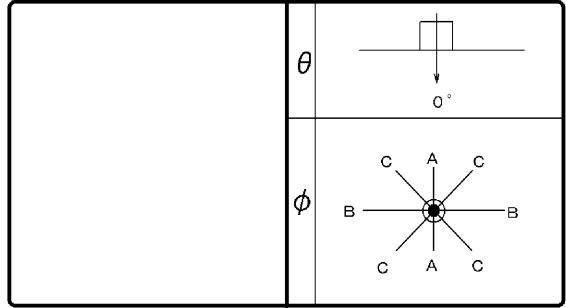

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	2150 lm

保 守 率	良	0.77
	中	0.72
	否	0.68

前面	カバー (透明)
反射面	

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備考	LEDG-18901M-LS9 + LEEU-2505L2-04
----	----------------------------------

$\theta \setminus \phi$	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	777		
10°	681		
20°	510		
30°	396		
40°	276		
50°	162		
60°	81		
70°	28		
80°	7		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0														
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10													
室指数	固有照明率 (×0.01)																																															
0.60	75	69	63	60	56	54	73	68	62	59	55	54	61	58	55	53	54	53	50	48																												
0.80	87	79	76	71	68	66	85	78	75	71	68	65	73	69	67	65	66	64	61	59																												
1.00	93	84	82	76	75	71	91	82	81	75	74	70	78	74	72	70	71	69	66	64																												
1.25	100	88	89	82	82	76	97	87	87	81	80	76	84	79	78	75	77	74	71	69																												
1.50	104	91	94	85	87	81	101	90	92	84	85	80	89	83	83	79	81	78	75	73																												
2.00	110	96	102	91	95	87	107	95	100	90	94	86	95	88	90	85	87	84	81	80																												
2.50	114	98	107	94	101	91	110	97	104	93	98	90	99	91	95	89	91	87	85	83																												
3.00	117	100	110	97	105	93	113	99	107	96	102	93	102	94	98	91	94	90	87	86																												
4.00	120	102	115	99	110	97	116	101	112	98	108	96	105	96	102	95	98	93	91	89																												
5.00	122	103	118	101	114	99	118	102	114	100	111	98	108	98	105	97	100	95	93	91																												
10.00	127	106	124	105	122	104	122	105	120	104	118	103	112	102	111	101	105	99	97	95																												

