

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKBW209161L-LS9

効 率	F 	13 %
	F 	87 %
	F 	100 %
	器具 光束	1300 lm

保 守 率	良	0.81
	中	0.77
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

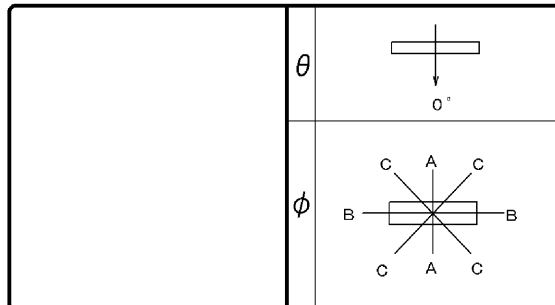

備考

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
						室指数	固 有 照 明 率 (×0.01)																				
0°	262	262	262	0.60	58	53	44	41	35	34	55	51	42	40	34	33	40	38	33	32	31	30	26	23			
10°	257	257	258	0.80	69	63	55	51	45	43	66	61	53	50	44	43	50	47	42	41	40	39	34	31			
20°	247	241	244	1.00	76	69	62	57	52	50	73	66	60	56	51	48	56	53	48	46	46	44	39	36			
30°	231	215	225	1.25	84	74	70	64	60	56	80	72	67	62	58	55	63	59	55	53	52	50	45	42			
40°	209	183	199	1.50	89	78	76	69	66	61	84	75	73	67	64	60	67	63	60	57	56	55	49	46			
50°	184	146	169	2.00	97	84	85	76	76	70	92	82	82	74	74	68	75	70	69	65	64	62	57	53			
60°	156	106	136	2.50	102	88	91	81	83	75	97	85	87	78	80	73	80	74	74	69	69	66	61	58			
70°	125	65	101	3.00	105	90	96	84	88	79	100	88	92	82	85	77	84	77	78	73	73	70	65	61			
80°	93	26	68	4.00	110	94	102	89	96	84	105	91	98	86	92	82	89	82	84	78	78	74	70	66			
90°	67	0	42	5.00	113	96	106	91	101	87	107	93	101	89	96	85	92	84	88	81	81	77	73	69			
100°	59	0	36	10.00	120	100	116	98	112	95	113	97	110	95	107	93	100	90	97	88	89	84	81	76			
110°	51	0	30																								
120°	41	0	24																								
130°	31	2	17																								
140°	21	2	11																								
150°	12	0	5																								
160°	4	2	2																								
170°	0	2	2																								
180°	0	2	2																								

