

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKBW209161YN-LD9

効 率	F 	13 %
	F 	87 %
	F 	100 %
	器具 光束	1350 lm

保 守 率	良	0.81
	中	0.77
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

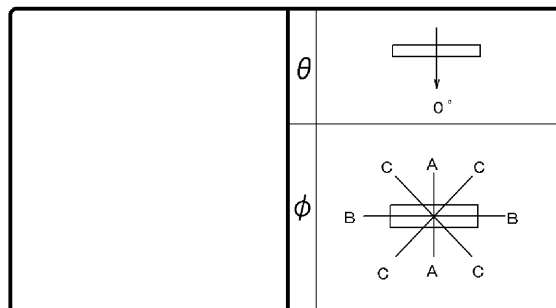

備考

光度 (cd/1000lm)				反 射 率 (%)	天井 壁 床	80						70						50						30		20	0				
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50		30		10	0		
0°	262	262	262			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
10°	256	257	257			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
20°	246	241	244	固有照明率 (×0.01)																											
30°	230	216	224	室指数																											
40°	209	183	199	0.60	58	53	44	41	35	34	56	51	42	40	34	33	40	38	32	32	31	30	26	23	23	23	23	23	23		
50°	184	147	169	0.80	69	63	55	51	45	43	66	61	53	50	44	43	50	47	42	41	40	39	34	31	31	31	31	31	31		
60°	156	107	137	1.00	76	69	62	57	52	50	73	66	60	56	51	48	56	53	48	46	46	44	39	36	36	36	36	36	36		
70°	125	65	102	1.25	84	75	70	64	60	56	80	72	67	62	58	55	63	59	55	53	52	50	45	42	42	42	42	42	42		
80°	94	27	69	1.50	89	78	76	69	66	61	85	76	73	67	64	60	67	63	60	57	56	55	49	46	46	46	46	46	46		
90°	68	0	43	2.00	97	85	85	76	76	70	92	82	82	74	74	68	75	70	69	65	64	62	57	53	53	53	53	53	53		
100°	60	0	37	2.50	102	88	91	81	83	75	97	85	88	79	80	73	80	74	74	70	69	66	61	58	58	58	58	58	58		
110°	51	0	30	3.00	106	91	96	84	88	79	100	88	92	82	85	77	84	77	79	73	73	70	65	61	61	61	61	61	61		
120°	41	0	24	4.00	110	94	103	89	96	84	105	91	98	86	92	82	89	82	85	78	78	74	70	66	66	66	66	66	66		
130°	31	0	17	5.00	113	96	107	92	101	88	108	93	102	89	96	85	93	84	88	81	81	77	73	69	69	69	69	69	69		
140°	21	0	11	10.00	120	100	116	98	112	95	114	97	110	95	107	93	100	90	97	88	89	84	81	76	76	76	76	76	76		
150°	12	0	5																												
160°	4	0	0																												
170°	0	0	0																												
180°	0	0	0																												

