

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD87157L (W) -LS1

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	740 lm

保 守 率	良	0.67
	中	0.63
	否	0.56

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	
反射面	塗装 (白)

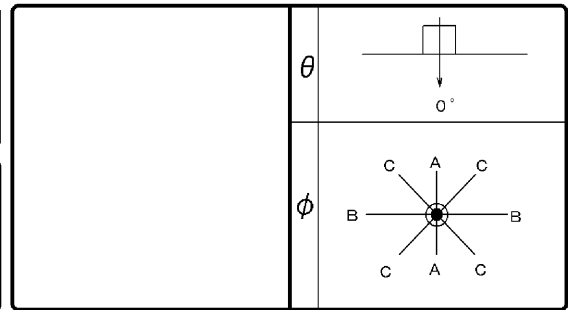

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	400		
10°	390		
20°	367		
30°	330		
40°	281		
50°	217		
60°	143		
70°	67		
80°	12		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		65	60	52	49	43	42	64	59	51	49	43	42	49	47	42	41	42	41	37	35			
0.80		78	71	65	61	56	54	76	70	64	60	55	53	61	59	54	53	53	52	48	46			
1.00		85	77	72	67	63	60	83	75	71	66	63	60	68	65	61	59	60	58	54	52			
1.25		93	83	81	74	72	67	90	81	79	73	71	67	76	71	69	66	67	65	61	59			
1.50		98	86	86	78	78	72	95	85	84	78	77	72	81	76	74	71	72	70	66	64			
2.00		106	92	96	86	88	81	103	91	94	85	87	80	89	83	83	79	81	78	74	72			
2.50		110	95	102	90	95	85	107	94	99	89	93	85	94	87	89	83	85	82	79	77			
3.00		114	98	106	93	100	89	110	96	103	92	97	88	98	90	93	87	89	85	82	80			
4.00		118	100	112	97	106	94	114	99	108	96	104	93	102	94	99	91	94	89	87	85			
5.00		121	102	115	99	111	96	116	101	112	98	108	95	105	96	102	94	97	92	90	88			
10.00		126	105	123	104	120	102	121	104	119	102	116	101	111	100	109	99	103	97	95	94			

