

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD87151WW (W) -LS1

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		610 lm

保守率	良	0.67
	中	0.63
	否	0.56

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	
反射面	塗装 (白)

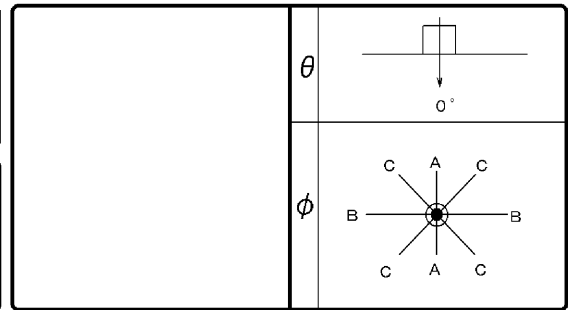

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	365		
10°	357		
20°	337		
30°	306		
40°	265		
50°	216		
60°	159		
70°	93		
80°	14		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	固有照明率 (×0.01)																					
0.60	63	58	49	47	41	40	62	57	49	46	40	39	47	45	40	39	39	38	34	32		
0.80	76	69	62	58	53	51	74	68	61	57	52	50	59	56	51	50	50	49	45	43		
1.00	83	75	70	65	61	57	81	73	68	64	60	57	66	62	58	56	57	55	51	49		
1.25	91	81	78	72	69	65	88	79	77	71	68	64	73	69	66	63	64	62	58	56		
1.50	96	85	84	76	75	70	93	83	82	76	74	69	79	74	72	68	70	67	63	61		
2.00	105	91	94	84	86	79	101	89	92	83	84	78	87	81	81	77	78	75	72	70		
2.50	109	94	100	88	93	84	106	93	97	87	91	83	92	85	87	81	83	80	77	75		
3.00	113	97	105	92	98	87	109	95	102	91	96	87	96	89	91	85	87	84	80	78		
4.00	117	100	111	96	105	92	113	98	107	95	102	92	101	93	97	90	93	88	85	84		
5.00	120	101	115	98	110	95	116	100	111	97	107	95	104	95	101	93	96	91	89	87		
10.00	126	105	123	103	120	102	121	104	118	102	116	101	111	100	109	99	103	97	95	93		

