

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD87154N (W) -LS1

効 率	F 	0 %
	F 	101 %
	F 	101 %
器具光束		860 lm

保守率	良	0.67
	中	0.63
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	
反射面	塗装 (白)

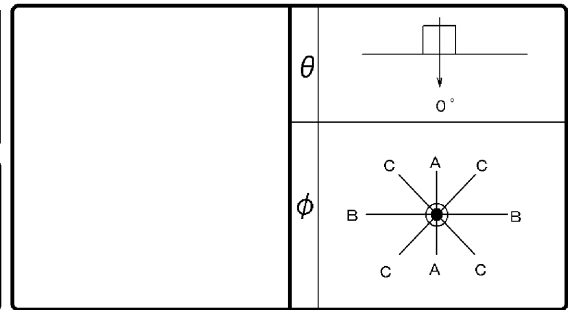

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	359		
10°	353		
20°	334		
30°	304		
40°	265		
50°	216		
60°	161		
70°	96		
80°	18		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		固有照明率 (×0.01)																						
0.60		64	58	49	47	41	39	62	57	48	46	40	39	47	45	40	39	39	38	34	32			
0.80		76	69	62	58	53	51	74	68	61	57	52	50	59	56	51	50	50	49	44	43			
1.00		83	75	70	65	60	57	81	73	68	64	60	57	66	62	58	56	57	55	51	49			
1.25		91	81	78	72	69	65	88	80	77	71	68	64	73	69	66	63	64	62	58	56			
1.50		97	85	84	77	75	70	93	83	82	76	74	69	79	74	72	68	69	67	63	61			
2.00		105	91	94	84	86	79	101	90	92	83	84	78	87	81	81	77	78	75	72	69			
2.50		110	95	100	89	93	84	106	93	98	88	91	83	93	86	87	81	84	80	77	75			
3.00		113	97	105	92	98	88	109	96	102	91	96	87	96	89	91	85	88	84	80	78			
4.00		118	100	111	96	105	93	114	99	108	95	103	92	102	93	98	90	93	88	86	84			
5.00		121	102	115	99	110	96	116	101	111	98	107	95	105	95	101	93	96	91	89	87			
10.00		126	106	123	104	120	102	122	104	119	103	117	101	111	101	109	99	103	97	96	93			

