

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD87151L (W) -LS1

効 率	F 	0 %
	F 	99 %
	F 	99 %
	器具 光束	550 lm

保守 率	良	0.67
	中	0.63
	否	0.56

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	
反射面	塗装 (白)

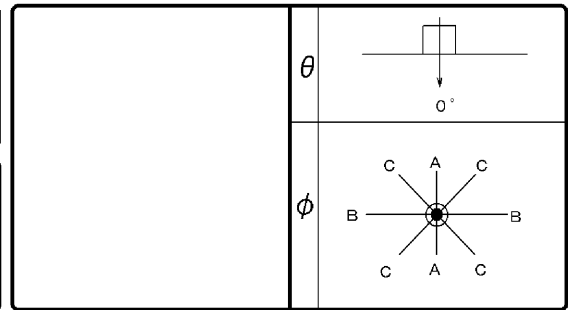

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	359		
10°	351		
20°	332		
30°	302		
40°	261		
50°	213		
60°	157		
70°	94		
80°	17		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		63	58	49	46	40	39	61	57	48	46	40	39	46	45	39	38	39	38	34	32			
0.80		75	68	61	57	52	50	73	67	60	57	52	50	58	55	51	49	50	49	44	42			
1.00		82	74	69	64	60	57	80	73	68	63	59	56	65	62	58	55	56	55	50	48			
1.25		90	80	77	71	68	64	87	79	76	70	67	63	73	68	65	63	63	62	57	55			
1.50		95	84	83	76	74	69	92	82	81	75	73	69	78	73	71	67	69	66	62	60			
2.00		104	90	93	83	85	78	100	89	91	82	83	77	86	80	80	76	77	74	71	69			
2.50		108	93	99	88	92	83	104	92	96	86	90	82	91	84	86	80	82	79	76	74			
3.00		112	96	104	91	97	86	108	94	101	90	95	86	95	88	90	84	86	83	79	77			
4.00		116	99	110	95	104	91	112	97	106	94	101	91	100	92	96	89	92	87	85	83			
5.00		119	101	113	97	109	94	115	99	110	96	105	94	103	94	100	92	95	90	88	86			
10.00		124	104	122	102	119	101	120	103	117	101	115	100	110	99	108	98	102	96	94	92			

