

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDP88074

光源	名称	LEDランプ
	形 名	LDG11L-G/10 OW/2
	光束	1340 lm × 3

前 面	
反射面	

保守率	良	0.63
	中	0.60
	否	0.56

効 率	F	35 %
	F	48 %
	F	83 %
	器具光束	3300 lm

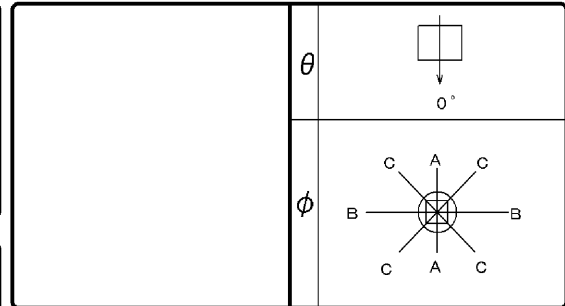

最大取付間隔		備考	
A-A	1.3 H		
B-B	1.3 H		

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	83		
10°	112		
20°	96		
30°	73		
40°	65		
50°	69		
60°	73		
70°	76		
80°	78		
90°	77		
100°	74		
110°	69		
120°	60		
130°	50		
140°	40		
150°	29		
160°	19		
170°	10		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		42	38	30	28	23	22	38	35	28	27	21	21	24	23	18	18	16	15	11	8		
0.80		50	45	37	35	29	28	45	42	35	33	27	26	29	28	24	23	20	20	15	11		
1.00		55	49	43	40	34	33	50	45	39	37	32	31	33	32	27	26	23	23	18	14		
1.25		61	54	49	45	40	38	55	50	45	41	37	35	38	36	32	30	27	26	21	16		
1.50		64	57	53	48	44	41	59	52	49	45	41	39	41	38	35	33	29	28	23	18		
2.00		71	62	60	54	52	48	65	57	55	50	48	44	46	43	41	39	34	33	27	22		
2.50		75	64	65	57	57	52	68	60	60	54	53	48	50	46	45	42	37	36	30	24		
3.00		78	67	69	60	62	55	71	62	63	56	57	51	53	49	48	45	40	38	33	26		
4.00		82	70	74	64	68	60	75	65	68	60	62	56	57	52	53	49	44	42	36	29		
5.00		84	71	78	67	72	63	77	67	71	63	66	59	60	54	56	51	46	44	38	31		
10.00		90	75	86	73	82	70	83	71	79	68	76	66	66	60	63	58	53	50	45	37		

