


東芝照明器具配光データシート

名 称	LED高天井用照明器具
形 名	LEDJ-21007N-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束	22500 lm	

保守率	良	0.83
	中	0.81
	否	0.77

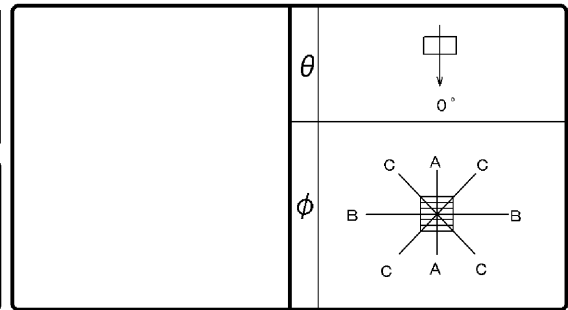

前 面	カバー（レンズ）
反射面	

最大取付間隔		
A-A	1.1	H
B-B	1.1	H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	676		
10°	631		
20°	565		
30°	475		
40°	317		
50°	134		
60°	33		
70°	16		
80°	6		
90°	2		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		77	71	66	63	59	57	76	70	65	62	59	57	64	61	58	57	57	56	53	52		
0.80		90	82	79	74	72	69	88	81	78	74	72	69	76	73	70	68	69	68	65	63		
1.00		96	86	85	79	78	74	94	85	84	79	77	74	82	77	76	73	74	73	69	68		
1.25		102	91	92	84	85	80	99	89	90	84	84	79	87	82	82	79	80	78	75	73		
1.50		106	93	97	88	90	84	103	92	95	87	89	83	91	86	86	82	84	81	78	77		
2.00		112	98	104	93	98	90	109	96	102	92	96	89	98	91	93	88	90	87	84	83		
2.50		115	100	109	96	103	93	112	98	106	95	101	92	101	93	97	91	93	89	87	86		
3.00		118	101	112	98	107	95	114	100	109	97	104	94	103	95	100	93	96	92	89	88		
4.00		121	103	116	100	112	98	117	102	113	99	109	97	107	97	104	96	99	94	92	90		
5.00		123	104	119	102	115	100	119	103	115	101	112	99	108	99	106	97	101	96	94	92		
10.00		127	106	124	105	122	104	122	105	120	104	118	103	112	102	111	101	105	99	97	95		

