

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH8104B01-LC

効 率	F 	11 %
	F 	89 %
	F 	100 %
器具光束		4300 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

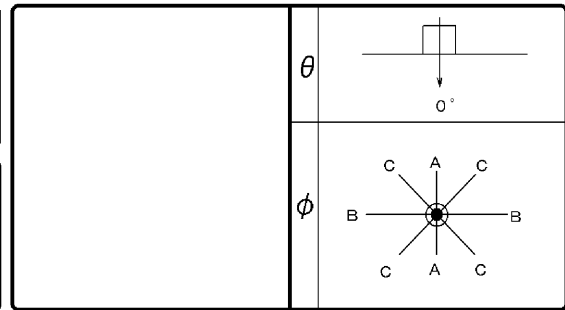

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20		0							
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30		10	0			
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0				
						固 有 照 明 率 (×0.01)																														
0°	272	272	272	室指数																																
10°	268	269	269	0.60	59	54	45	42	36	35	57	52	43	41	35	34	41	39	34	33	32	32	27	25												
20°	257	258	258	0.80	71	64	56	53	47	45	68	62	54	51	46	44	51	49	44	42	42	41	36	33												
30°	239	240	239	1.00	78	70	63	59	54	51	74	67	61	57	52	50	58	55	50	48	48	46	41	38												
40°	212	214	213	1.25	85	76	72	66	62	58	81	73	69	64	60	57	65	61	57	55	54	53	47	44												
50°	179	181	179	1.50	90	80	77	70	68	63	86	77	75	69	66	62	69	65	62	59	59	57	52	49												
60°	139	142	139	2.00	99	86	87	78	78	72	94	83	84	76	76	70	78	72	71	67	67	64	60	56												
70°	95	97	95	2.50	103	89	93	82	85	77	98	87	90	80	82	75	83	76	77	72	72	69	64	61												
80°	53	54	53	3.00	107	92	98	86	90	81	102	89	94	84	87	79	87	80	81	76	76	72	68	64												
90°	25	24	24	4.00	112	95	104	90	98	86	106	92	100	88	94	84	92	84	87	81	81	77	73	69												
100°	15	14	14	5.00	115	97	108	93	103	89	109	94	104	91	99	87	95	86	91	84	84	80	76	72												
110°	15	15	15	10.00	121	101	117	99	114	97	115	99	112	97	109	95	102	92	100	90	92	87	83	79												
120°	17	16	17																																	
130°	18	18	18																																	
140°	19	19	19																																	
150°	19	20	20																																	
160°	20	20	20																																	
170°	22	22	23																																	
180°	23	23	23																																	

