


# 東芝照明器具配光データシート

名称	街路照明器具
形名	HG-13000WK

保守率	良	0.73
	中	0.69
	否	0.65


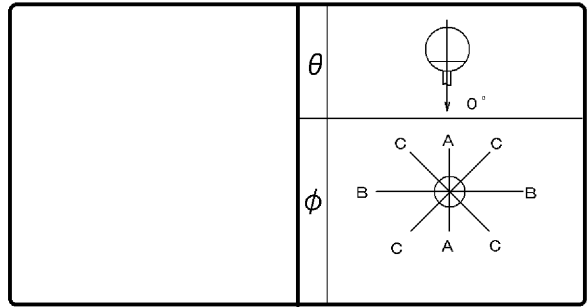


光源	名称	蛍光水銀ランプ
	形名	HF100X
	光束	4200 lm × 1

効率	F $\cap$	39.7 %
	F $\cup$	41.0 %
	F $\circ$	80.7 %
	器具光束	3390 lm

備考

前面	グローブ (乳白)
反射面	

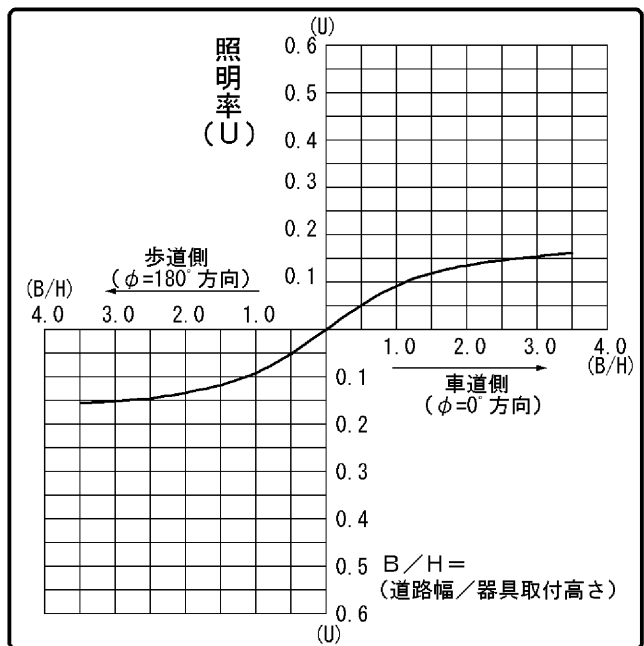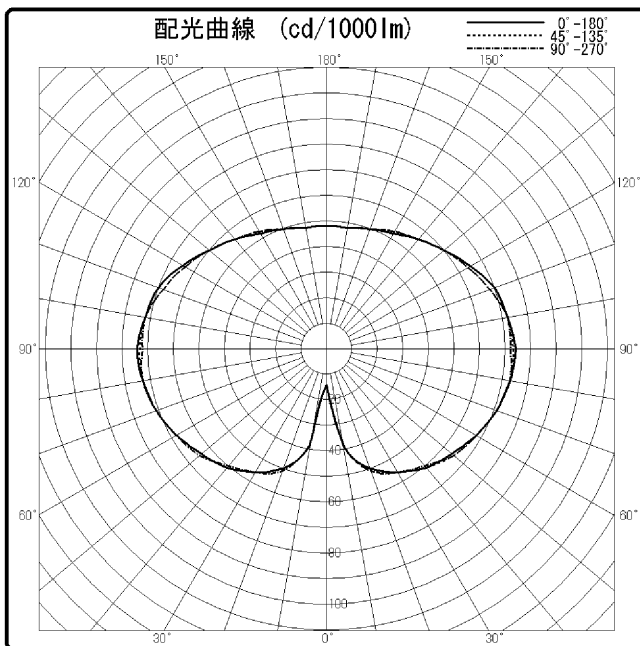

$\theta \setminus \phi$	$0^\circ$	$45^\circ$	$90^\circ$	$135^\circ$	$180^\circ$
$0^\circ$	14	14	14	14	14
$10^\circ$	39	39	38	39	39
$20^\circ$	50	51	51	50	50
$30^\circ$	56	56	56	56	56
$40^\circ$	61	61	60	61	61
$50^\circ$	64	65	65	64	64
$60^\circ$	68	68	68	68	68
$70^\circ$	71	71	71	71	71
$80^\circ$	73	73	73	73	73
$90^\circ$	74	73	72	73	74
$100^\circ$	72	72	72	72	72
$110^\circ$	70	68	68	68	70
$120^\circ$	65	64	64	64	65
$130^\circ$	60	60	60	60	60
$140^\circ$	56	56	56	56	56
$150^\circ$	52	53	53	53	52
$160^\circ$	50	50	50	50	50
$170^\circ$	48	48	48	48	48
$180^\circ$	48	48	48	48	48

