


東芝ランプ 配光データシート

名称	ネオハロビーム
形名	JR12V20W/K5 SEZ
光束	320 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

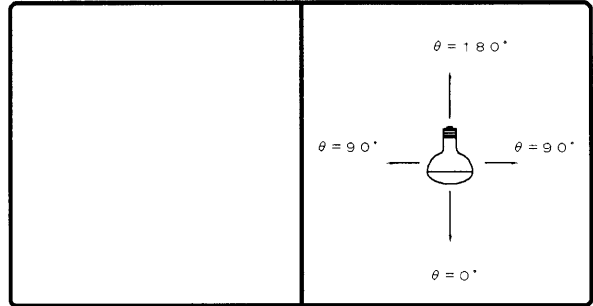

効率	F	%
	F	%
	F	100 %
	器具光束	320 lm

最大取付間隔	
A-A	0.2 H
B-B	0.2 H

備考

光度 (cd/1000lm)			
0°	15625	25°	94
1°		30°	94
2°		35°	94
3°		40°	94
4°		45°	94
5°	7813	50°	94
6°		55°	78
7°		60°	31
8°		65°	31
9°		70°	31
10°	1422	75°	16
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	391		
16°			
17°			
18°			
19°			
20°	156		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	10	10	10	10	0		
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																			
0.60	89	82	80	76	74	72	88	81	79	75	73	71	77	74	72	71	71	70	67	66
0.80	97	88	87	82	81	77	94	86	86	81	80	77	83	79	78	76	77	75	72	71
1.00	102	92	93	86	86	82	99	90	91	85	85	81	88	83	83	80	81	79	76	74
1.25	106	94	96	88	90	84	103	92	94	87	88	84	90	85	86	82	83	80	78	76
1.50	109	96	100	91	93	87	105	94	97	89	91	86	93	87	88	84	85	82	79	77
2.00	113	98	105	94	99	90	109	97	102	93	97	89	97	90	92	87	88	85	82	80
2.50	117	101	109	97	104	93	112	99	106	95	101	92	100	92	96	90	91	88	85	82
3.00	119	102	113	99	108	96	115	100	109	97	105	95	103	94	99	92	94	90	87	85
4.00	123	105	118	102	114	100	118	103	114	101	110	99	107	98	104	96	98	93	91	88
5.00	126	106	122	105	118	103	121	104	117	103	114	101	109	100	107	99	101	96	94	91
10.00	131	109	130	109	129	109	126	108	125	108	124	108	116	104	115	104	107	101	100	97

