


# 東芝ランプ 配光データシート

名称	東芝LED電球
形名	LDA5L-G/40W
光束	485 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

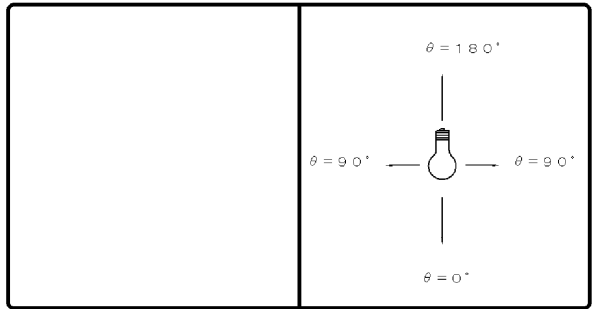

効率	F		%
	F		%
	F	100	%
	器具光束	485	lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		109	
10°		107	
20°		107	
30°		106	
40°		105	
50°		104	
60°		101	
70°		98	
80°		92	
90°		86	
100°		79	
110°		70	
120°		62	
130°		53	
140°		44	
150°		36	
160°		29	
170°		0	
180°		0	

反射率 (%)	天井	80				70				50				30		20		0			
	壁	70	50	30		70	50	30		50	30			30	10	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照明率 (×0.01)																			
0.60		50	46	36	34	27	26	46	43	33	32	25	25	29	28	22	22	19	19	14	10
0.80		60	55	45	42	35	34	56	51	42	40	33	32	36	35	29	28	25	25	19	15
1.00		67	60	52	48	42	40	62	56	48	45	39	37	42	39	34	33	29	29	23	18
1.25		74	66	59	54	49	46	68	61	55	51	46	43	47	45	40	38	34	33	27	22
1.50		79	69	65	59	54	51	72	65	60	55	51	48	51	48	44	42	38	37	30	24
2.00		87	76	74	66	64	59	80	71	69	62	60	55	59	54	52	49	44	43	36	29
2.50		92	79	80	71	71	64	84	74	74	67	66	60	63	58	57	53	48	46	40	33
3.00		96	82	85	74	76	68	88	77	78	70	71	64	67	61	61	57	52	49	43	36
4.00		101	85	92	79	84	74	92	80	85	75	78	69	72	66	67	61	56	54	47	40
5.00		104	88	96	82	89	77	95	82	88	77	82	73	75	68	70	65	60	57	50	42
10.00		111	93	106	89	101	86	102	87	98	84	94	82	83	75	80	73	68	64	58	50

