


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEKD2523105WV-LS9

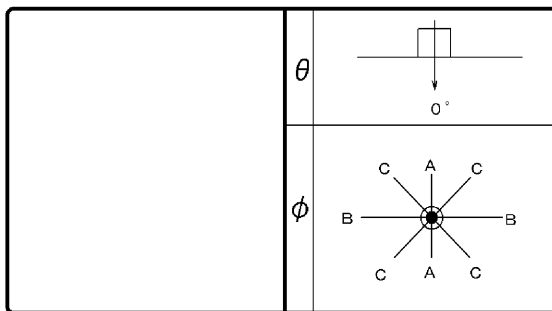

効 率	F $\frac{1}{2}$	0%
	F $\frac{1}{4}$	100%
	F $\frac{1}{8}$	100%
器具 光束	1580 lm	

保守 率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	銀色鏡面仕上げ

最大取付間隔	
A-A	0.87 H
B-B	0.87 H

備考

$\theta \backslash \phi$	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	1375		
10°	1465		
20°	1159		
30°	429		
40°	27		
50°	0		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0
	壁	70		50		30		70		50		30		50		30		30		30		10		10		10		0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0				
室指数	固有照明率 (×0.01)																															
0.60	100 92 92 88 88 85 98 91 92 87 88 85 90 87 87 85 86 84 83 82																															
0.80	109 99 103 96 99 95 108 99 102 96 98 94 100 95 97 94 96 94 92 92																															
1.00	111 100 104 97 100 95 109 99 103 97 99 95 101 96 97 94 96 94 92 91																															
1.25	113 101 107 98 102 96 111 100 105 97 101 95 102 96 99 94 97 94 92 91																															
1.50	115 102 109 99 104 97 113 101 107 98 103 97 104 97 100 96 98 95 93 92																															
2.00	118 103 113 101 108 99 115 102 110 100 106 98 106 99 103 97 100 96 95 93																															
2.50	120 104 115 102 111 100 117 103 112 101 109 99 108 100 105 98 101 97 96 94																															
3.00	122 104 117 103 113 101 118 103 114 102 111 100 109 100 106 99 102 98 96 95																															
4.00	124 106 121 104 117 103 120 105 117 103 114 102 111 102 109 101 104 99 98 97																															
5.00	126 106 123 105 120 104 122 105 119 104 117 104 113 103 111 102 106 100 99 98																															
10.00	129 108 128 108 127 108 125 107 124 107 123 107 116 105 115 105 109 103 102 100																															

