


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDA6L-G-E17 /S/60W2
光束	760 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

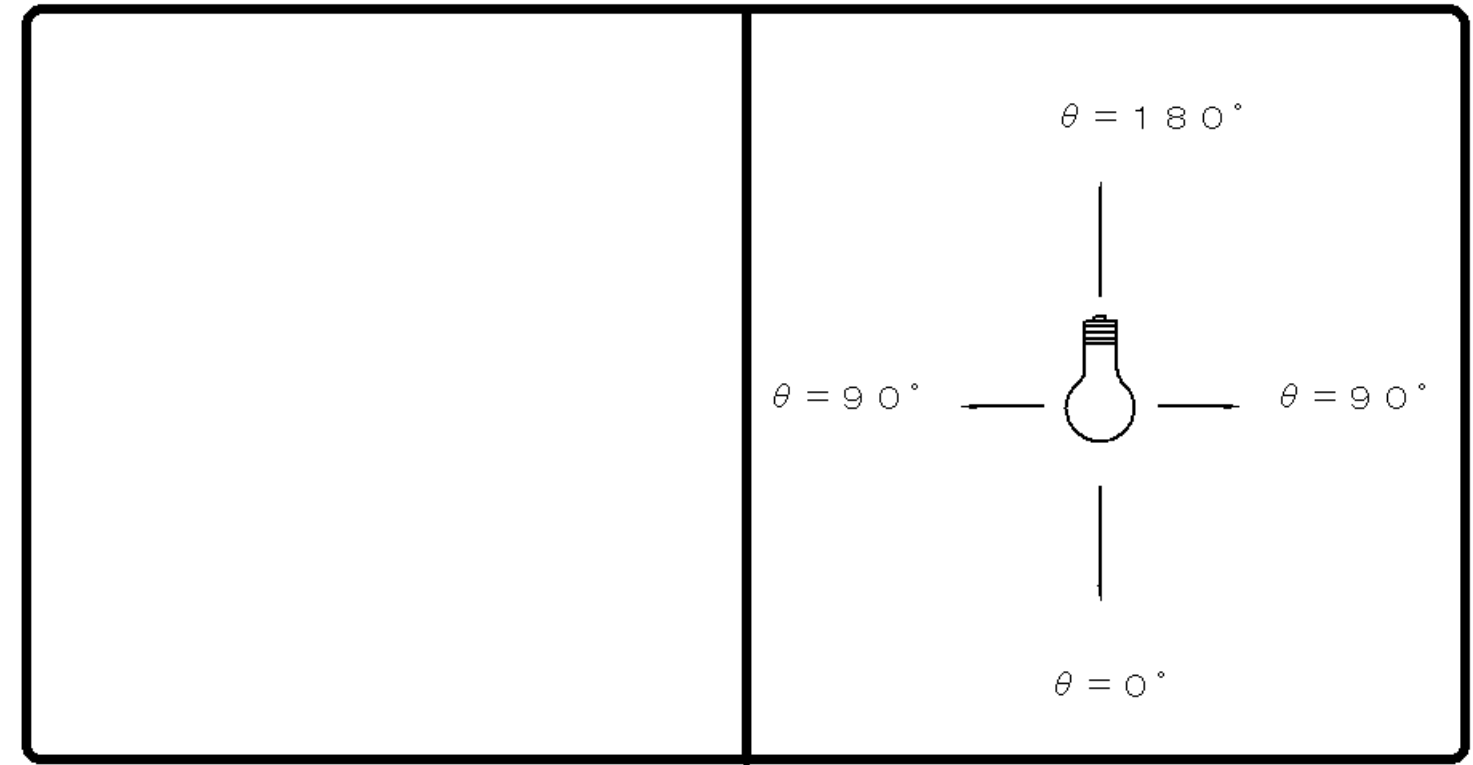

効率	F	%
	F	%
	F	100 %
	器具光束	760 lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	136		
10°	137		
20°	137		
30°	135		
40°	131		
50°	125		
60°	116		
70°	106		
80°	95		
90°	83		
100°	70		
110°	58		
120°	45		
130°	33		
140°	23		
150°	14		
160°	7		
170°	2		
180°	1		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0		0		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	照明率 (×0.01)																																				
0.60	52	48	37	35	28	27	48	45	35	33	27	26	31	30	24	24	22	21	16	13																	
0.80	62	56	47	44	37	35	58	53	44	42	35	34	39	38	32	31	29	28	22	19																	
1.00	69	62	54	50	43	41	64	58	51	47	41	39	45	43	37	36	33	32	27	23																	
1.25	76	68	62	56	51	48	71	64	58	54	48	46	51	48	43	42	39	38	31	27																	
1.50	81	72	67	61	57	52	76	67	63	58	54	50	56	52	48	46	43	41	35	30																	
2.00	89	78	77	68	66	61	83	74	72	65	63	58	63	59	56	53	50	48	41	36																	
2.50	94	81	83	73	73	66	88	77	77	69	69	63	68	63	61	57	54	52	46	40																	
3.00	98	84	87	77	79	70	91	80	82	73	74	67	72	66	65	61	58	55	49	43																	
4.00	103	88	94	81	86	76	96	83	88	78	81	73	77	70	71	66	63	60	54	48																	
5.00	106	90	99	85	91	80	99	86	92	81	86	76	80	73	75	69	66	63	57	51																	
10.00	114	95	109	92	104	89	106	91	101	88	98	85	88	80	85	77	75	70	65	58																	

