


東芝照明器具配光データシート

名称	東芝LED器具
形名	LEKTW815134N-LS9

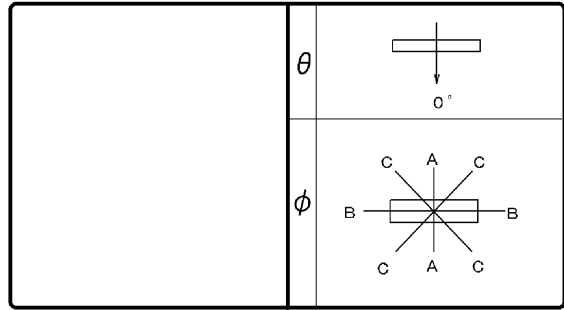

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	12800 lm

保 守 率	良	0.86
	中	0.81
	否	0.72

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	331	331	331
10°	323	326	326
20°	307	308	310
30°	282	279	283
40°	251	241	249
50°	210	196	209
60°	164	145	160
70°	112	89	107
80°	58	34	52
90°	0	1	1
100°	0	1	1
110°	0	2	1
120°	0	1	1
130°	0	1	0
140°	0	1	0
150°	0	1	0
160°	0	1	0
170°	0	1	0
180°	0	1	0

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 ($\times 0.01$)																							
0.60		62	57	47	45	39	37	60	55	46	44	38	37	45	43	37	37	37	36	32	30				
0.80		74	67	59	56	50	48	72	66	58	55	49	48	56	53	48	47	47	46	41	40				
1.00		81	73	67	62	57	54	78	71	65	61	57	54	63	60	55	53	54	52	47	45				
1.25		89	79	75	69	66	62	86	77	74	68	65	61	70	66	63	60	61	59	54	52				
1.50		94	83	81	74	72	67	91	81	79	73	71	66	76	71	68	65	66	64	59	57				
2.00		102	89	91	82	83	75	99	87	89	81	81	75	84	78	78	73	75	72	68	66				
2.50		107	93	97	86	89	81	103	91	95	85	87	80	89	83	84	78	80	77	73	71				
3.00		111	95	102	90	95	85	107	94	99	88	93	84	94	86	88	82	84	81	77	75				
4.00		116	98	109	94	102	90	111	97	105	93	100	89	99	90	94	87	90	86	83	80				
5.00		119	100	113	97	107	93	114	99	109	95	104	92	102	93	98	90	93	89	86	84				
10.00		125	104	121	102	118	100	120	103	117	101	114	99	109	99	107	97	101	95	93	91				

