


# 東芝照明器具配光データシート

名称	BY570P LED150CW PSU WB JP
形名	BY570P150CWPSUW

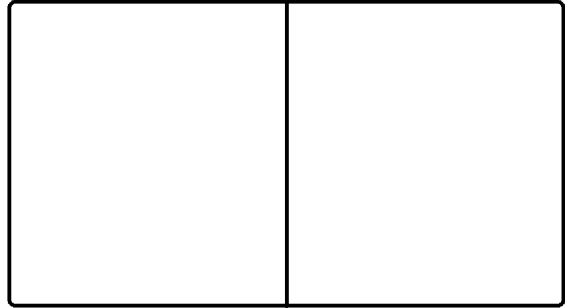

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	15050 lm

保 守 率	良	0.78
	中	0.76
	否	0.72

前面	レンズ (広角)
反射面	

最大取付間隔	
A-A	1.4 H
B-B	1.4 H

備 考	銘板表示形名 :
	BY570P LED150CW PSU WB JP

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	440		
10°	446		
20°	460		
30°	457		
40°	365		
50°	168		
60°	62		
70°	21		
80°	5		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30						20						0									
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0													
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10										
室指数		固有照明率 (×0.01)																																							
0.60		72	66	60	57	52	50	70	65	59	56	52	50	57	55	51	50	50	49	46	44	72	66	60	57	52	50	70	65	59	56	52	50	57	55	51	50	50	49	46	44
0.80		85	78	73	69	66	63	83	76	72	68	65	63	70	67	64	62	63	62	58	56	85	78	73	69	66	63	83	76	72	68	65	63	70	67	64	62	63	62	58	56
1.00		92	83	81	75	73	69	90	81	79	74	72	69	77	73	71	68	69	67	64	62	92	83	81	75	73	69	90	81	79	74	72	69	77	73	71	68	69	67	64	62
1.25		99	88	88	81	81	76	96	87	87	80	80	75	84	79	78	74	76	74	70	69	99	88	88	81	81	76	96	87	87	80	80	75	84	79	78	74	76	74	70	69
1.50		104	91	94	85	86	80	101	90	92	84	85	80	88	83	83	79	80	78	75	73	104	91	94	85	86	80	101	90	92	84	85	80	88	83	83	79	80	78	75	73
2.00		111	96	102	91	96	87	107	95	100	90	94	87	95	89	91	85	88	84	82	80	111	96	102	91	96	87	107	95	100	90	94	87	95	89	91	85	88	84	82	80
2.50		114	99	107	95	101	91	111	97	104	94	99	90	99	92	95	89	91	88	85	83	114	99	107	95	101	91	111	97	104	94	99	90	99	92	95	89	91	88	85	83
3.00		117	100	111	97	105	94	113	99	108	96	103	93	102	94	98	92	94	90	88	86	117	100	111	97	105	94	113	99	108	96	103	93	102	94	98	92	94	90	88	86
4.00		121	102	115	100	111	97	116	101	112	99	108	96	106	97	103	95	98	93	91	89	121	102	115	100	111	97	116	101	112	99	108	96	106	97	103	95	98	93	91	89
5.00		122	104	118	101	114	99	118	102	114	100	111	98	108	98	105	97	100	95	93	91	122	104	118	101	114	99	118	102	114	100	111	98	108	98	105	97	100	95	93	91
10.00		127	106	124	105	122	103	122	105	120	103	118	102	112	101	110	100	104	98	97	95	127	106	124	105	122	103	122	105	120	103	118	102	112	101	110	100	104	98	97	95

