


東芝ランプ 配光データシート

名称	クールビームライト
形名	CRS100V90WL
光束	860 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

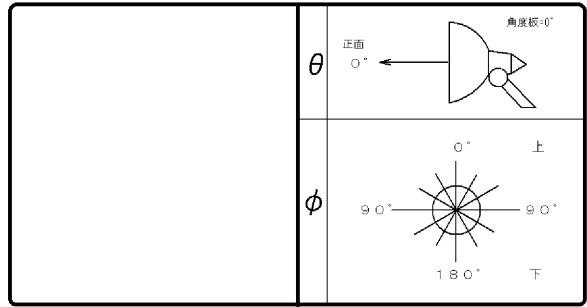

効率	F	%
	F	%
	F	100 %
	器具光束	860 lm

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	7748		
10°	2623		
20°	525		
30°	155		
40°	83		
50°	12		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20	0		
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	0				
室指数	照明率 (×0.01)																			
0.60	98	91	90	86	85	82	97	90	89	85	85	82	88	85	84	82	83	81	80	79
0.80	105	96	97	91	92	88	104	95	96	91	91	88	94	90	90	87	89	87	85	84
1.00	111	99	102	95	97	92	108	98	101	95	96	92	99	94	95	91	93	91	89	88
1.25	114	101	106	97	100	94	111	100	104	96	99	93	101	95	97	93	95	92	90	89
1.50	116	102	108	98	103	95	113	101	106	98	101	95	103	96	99	94	96	93	91	90
2.00	119	104	112	101	107	98	116	103	110	100	105	97	106	98	102	96	99	95	93	91
2.50	122	105	116	102	111	100	119	104	113	102	109	99	108	100	105	98	101	97	95	93
3.00	124	107	119	104	114	102	121	105	116	103	112	101	110	101	107	100	103	98	97	95
4.00	128	108	123	107	120	105	123	107	120	106	117	104	114	104	111	103	106	101	100	98
5.00	130	101	126	108	123	107	125	109	123	108	120	107	116	106	114	105	109	103	102	100
10.00	134	112	133	121	132	113	130	111	129	111	128	112	121	109	121	110	114	108	107	105

