


# 東芝ランプ 配光データシート

名称	ビームランプ
形名	BRF100V150W
光束	1700 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

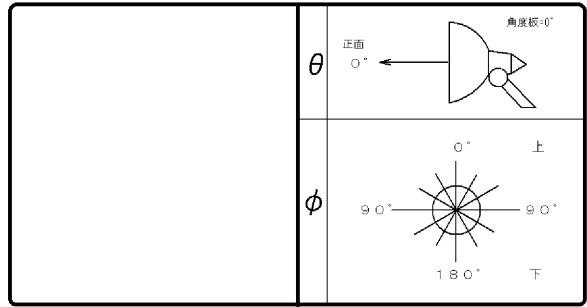

効率	F		%
	F		%
	F	100	%
	器具光束	1700	lm

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	2571		
10°	1898		
20°	814		
30°	312		
40°	122		
50°	37		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	70	50	30	50	30	30	10	10	0			
室指数	照明率 (×0.01)																			
0.60	90	83	80	76	74	72	88	82	79	76	74	72	78	75	73	72	71	69	68	
0.80	98	89	89	83	83	80	96	88	88	83	82	79	86	82	81	79	80	78	76	75
1.00	105	94	96	89	90	85	103	93	95	88	89	85	92	87	87	84	86	84	81	80
1.25	109	97	100	92	94	89	106	96	99	91	93	88	96	90	91	87	89	87	84	83
1.50	112	99	104	94	98	91	109	98	102	94	97	91	99	92	94	90	92	89	87	85
2.00	116	101	109	98	104	95	113	100	107	97	102	94	103	95	99	93	95	92	90	88
2.50	119	103	113	100	108	97	116	102	110	99	106	97	105	97	102	95	98	94	92	90
3.00	122	104	116	102	111	99	118	103	113	101	109	99	107	99	104	97	100	96	94	92
4.00	125	106	120	104	116	102	121	105	117	103	113	101	111	101	108	100	103	98	97	95
5.00	127	107	123	106	120	104	122	106	119	105	117	103	113	103	111	102	105	100	98	97
10.00	131	109	129	109	128	109	126	108	125	108	124	108	117	106	116	106	110	104	103	101

