


# 東芝ランプ 配光データシート

名称	LEDランプ
形名	LDA4N-G-E17 /S/40W
光束	440 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

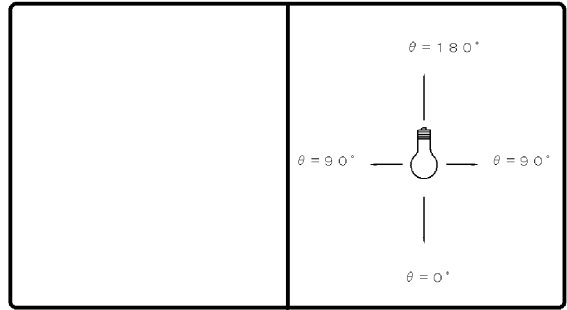

効 率	F		%
	F		%
	F	100	%
	器具 光束	440	lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	156		
10°	156		
20°	155		
30°	153		
40°	151		
50°	145		
60°	134		
70°	119		
80°	99		
90°	78		
100°	58		
110°	41		
120°	27		
130°	17		
140°	9		
150°	5		
160°	3		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照 明 率 (×0.01)																																				
0.60	53	49	38	36	29	28	50	46	36	34	28	27	33	32	25	25	23	23	18	15																	
0.80	63	58	48	45	38	36	60	55	46	43	36	35	42	40	34	33	31	30	25	21																	
1.00	70	63	55	51	44	42	66	60	52	49	43	41	47	45	39	38	36	35	29	26																	
1.25	78	69	63	58	52	49	73	66	60	55	50	47	54	51	46	44	42	41	35	31																	
1.50	83	73	69	62	58	54	78	70	65	60	55	52	59	55	51	48	46	45	39	35																	
2.00	91	80	78	70	68	62	86	76	74	67	65	60	67	62	59	56	54	52	46	41																	
2.50	96	83	85	75	75	68	90	80	80	72	71	65	72	66	65	61	59	56	51	46																	
3.00	100	86	90	78	81	72	94	82	85	75	77	69	76	70	69	65	63	60	54	49																	
4.00	106	90	96	83	88	78	99	86	91	80	84	75	81	74	76	70	68	65	60	54																	
5.00	109	92	101	87	94	82	102	88	95	83	89	79	85	77	80	73	72	68	63	58																	
10.00	116	97	111	94	107	91	109	94	105	91	101	88	93	84	90	82	81	76	72	66																	

